


TEGO WALL ASSEMBLY MANUAL 4 M




Axle dimension 1 m (39.37")
Height approx. 2.20 m (86.61")


TEGO WALL ASSEMBLY MANUAL 4 M



1. Make sure the base part is even with the edge of the stand.

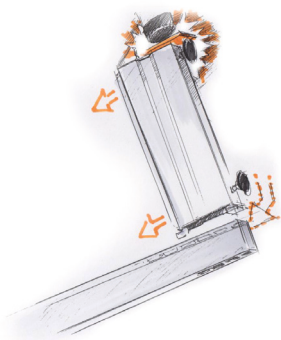

2. Use a wooden block and a rubber mallet to hammer the base part into the stand.

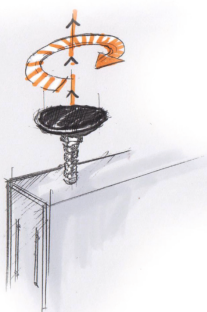

3. Unscrew all feet by 3-4 cm (1.18" - 1.57"). Do it prior to setting the shelf up, as adjusting it back to the required position is easier this way.

TEGO WALL ASSEMBLY MANUAL 4 M




4. Erect the assembled elements and set them up using the attached back panels. Use the bubble level to check the vertical and horizontal position of the shelf, adjust using the feet if required.

In case of shelf elements heavily loaded on one side, it would be sensible to either fix them to the wall to prevent from tipping over or to additionally install the free-standing shelves on the base parts. It shall be checked on site.




5. Install the base panels

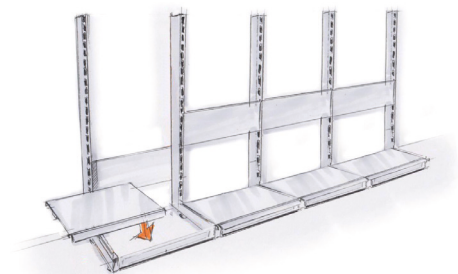


6. Install the bottom shelves towards the clicking position.

TEGO WALL ASSEMBLY MANUAL 4 M

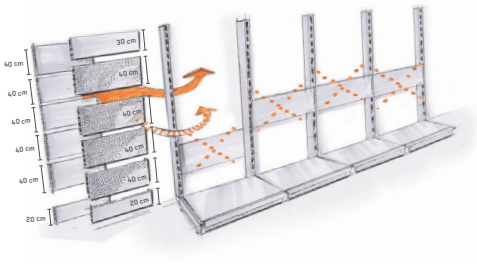

7. According to this layout, hook in the rear panels one after another from the bottom to the top. Remove the stabilising rear panels accordingly while doing so.

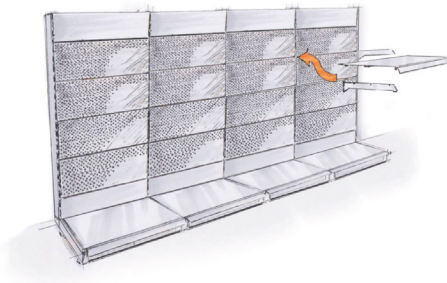

8. Hang the brackets at the height of the lower edge of the top 40 mm perforated rear panel. Then hook in the shelf on the horizontally hanging brackets and snap it into place.



We hope you will enjoy the new shelf.