


9200 Awnings

There is no one parts list for all of these as it would be dependent on fabric color, length, end cap color, hardware color, hardware height (standard, basement, or reduced pitch), and so on. Below however is the model breakdown. From there you could look in eDometic or Dometic Parts Web.

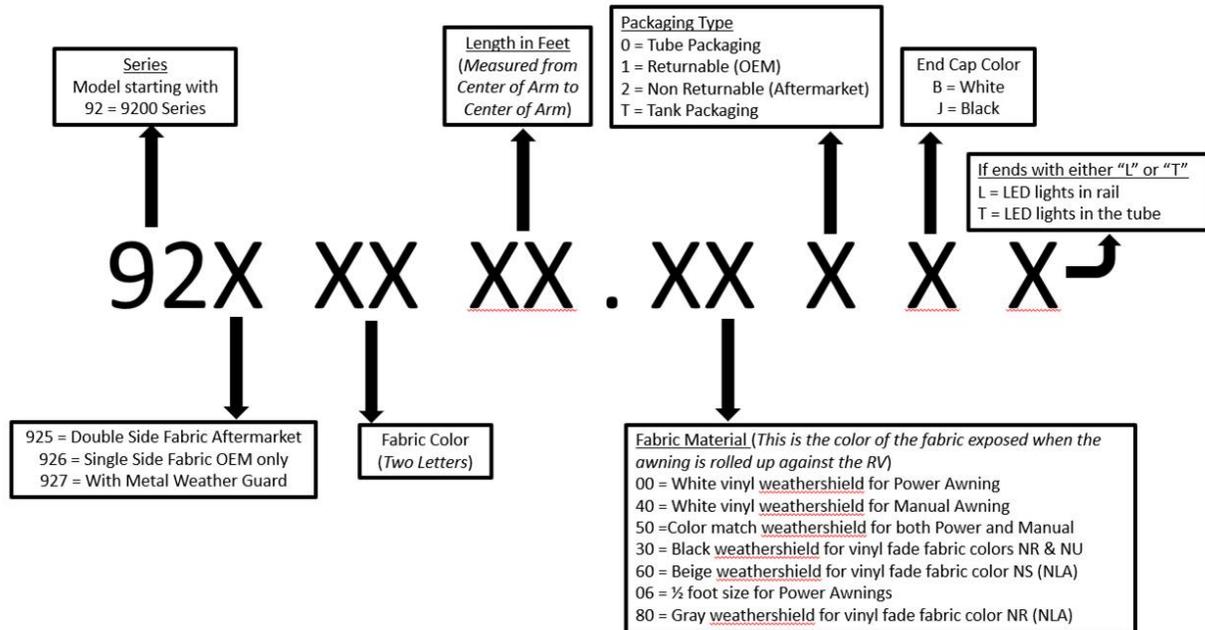

AVAILABLE FABRIC COLORS

Vinyl Fabric Colors Single & Double-Sided

Awning fabric sizes will be approximately 9 inches shorter than actual awning size



Color Code	Description
NR	ONYX
NT	AZURE
FJ	BLACK**
NW	MEADOW GREEN
CQ	POLAR WHITE**
NS	SANDSTONE
PH	SANDSTONE*
NU	BARK
PI	ONYX*
NW	MAROON

* Onyx and Sandstone single-sided vinyl fade fabric (OEM ONLY – NOT available in aftermarket).
** Polar White and Black solid vinyl fabric available in select sizes on select awning styles.

8962XX1.400(X)L	12"	Basement
8962XX2.400(X)L	7"	Standard
8962XX3.400(X)L	6"	Reduced Pitch

Removing the motor Removal from Tube;

So for the 9200 motor removal, they would need to drill out the RH end cap like they would be replacing a 9100 motor, then they can bend or clip the butterfly clip holding the motor in to the cap, reinstall the cap back to the tube, install the motor.