


TO CLOSE AWNING:


① Return Awning to Travel Position

⚠ CAUTION

When awning is closed, bottom arm assembly will fold down and against back channel. To avoid personal injury and/or property damage, keep space beneath bottom arm assembly clear of objects and people.

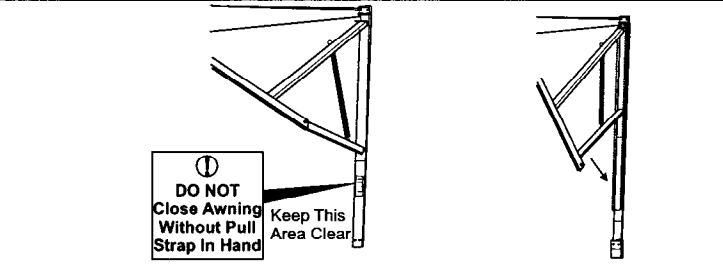


Important: Before closing, make sure travel strap and buckle are clear of back channel.

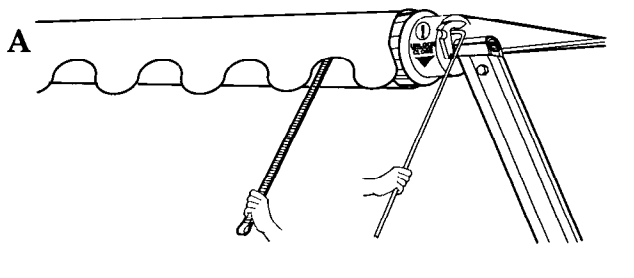

Remove tie downs and sun screen if installed. In one hand gently pull on the pull strap while using the pull rod to flip the Safe-T-Lock™ Lever down into the UNLOCK-CLOSE position.

⚠ CAUTION


Have a firm grip on the pull strap before moving the Safe-T-Lock™ Lever to the UNLOCK-CLOSE position. Do not allow the awning to close uncontrolled. Damage to the awning and/or RV may occur.

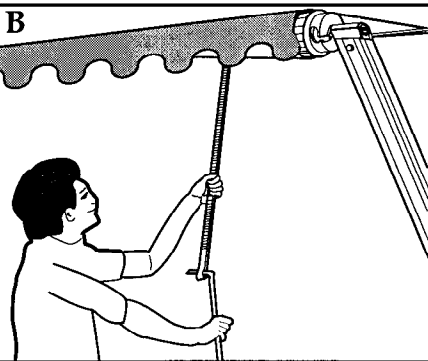

Before the awning begins to roll up, insert end of pull rod into the pull strap loop and let the awning roll in, controlling the speed with the rod in hand.

TO CLOSE AWNING (Continued):

② Lock Awning for Traveling

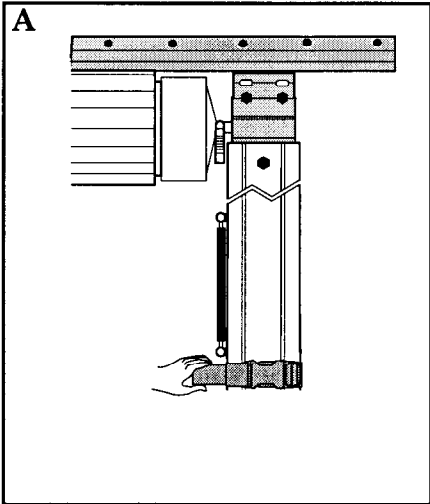

Secure each arm assembly by fastening and pulling on the loose end of strap to tighten.

The awning is now completely closed and secure.


A&E TWO STEP HELPFUL HINTS:

- Whenever the awning is wet while rolled up, as soon as conditions allow, roll it out and let it dry before rolling it up again. This will help prevent the formation of mildew and add greatly to the life of the awning.
- Mildew does not form on the fabric itself, but on the accumulated dust, dirt and grime. Periodically clean vinyl or woven acrylic fabric using a mixture of 1/4 cup of dish soap and 1/4 cup of bleach mixed with 5 gallons of warm water. Liberally slosh the mixture on the top of the fabric and roll the awning up for 5 minutes. This will apply the mixture to the bottom as well. Roll it back out and hose off with fresh water. Repeat if necessary. Allow to dry before rolling up.
- Always make sure the awning is fully extended before opening the entry door.

WHEN TO GET MORE HELP:

This User's Guide is intended to provide practical instruction for the sequential operation of the A&E Two Step Patio Awning. If malfunctions occur that cannot be corrected by reviewing this Guide, they should be directed to a qualified Dometic service technician.

Form No. 3108958.012 4/00
(Replaces 3108958.004)
(French 3109556.005)
©2000 The Dometic Corporation
LaGrange, IN 46761

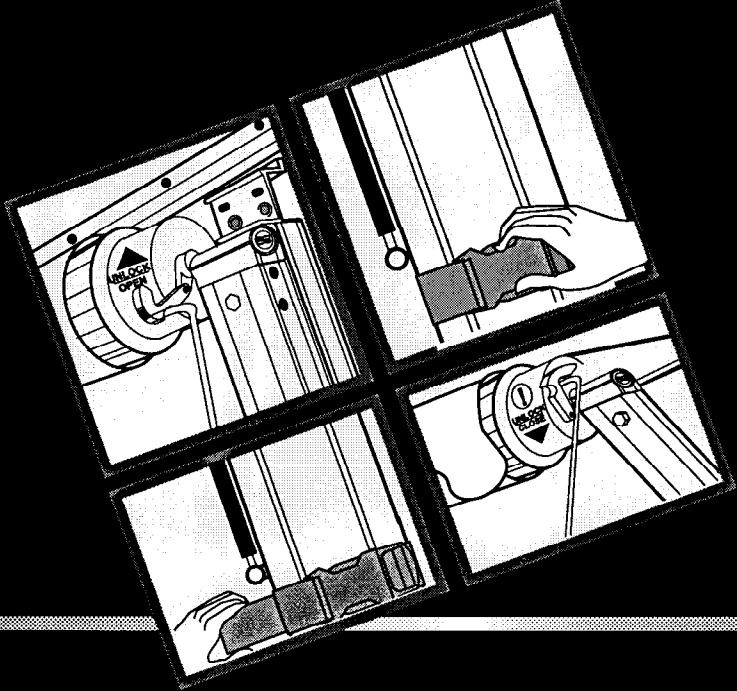


User's Guide

by The Dometic Corporation

TO OPEN AWNING:

① Unlock Awning

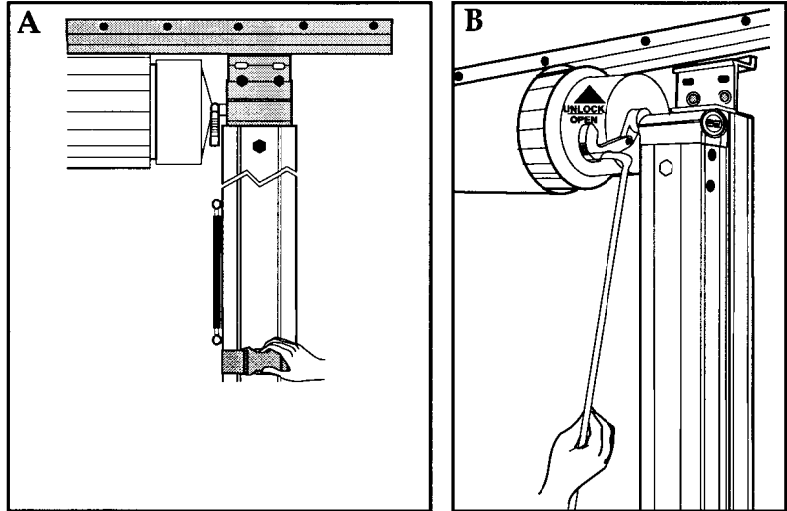


Release the travel strap located mid-way up each arm assembly by squeezing the travel strap buckle to release.

Use the pull rod provided to rotate the Safe-T-Lock™ Lever up to the UNLOCK-OPEN position.


Tie down straps

Your A & E Awning comes with two (2) tie down straps, two (2) springs and two (2) stakes. A & E tie down straps secure your awning through the utility slot in the roller tube. This method eliminates the risk of damaging the torsion rods. We recommend you use this method instead of former methods you may have used on your previous awning.

After awning is extended, slide straps in open groove in awning roller tube on left end. Position one at each end. Screw stakes into ground at desired position. Place strap through spring and attach spring to stake. Draw both straps tight by pulling on loose end of strap at buckle.

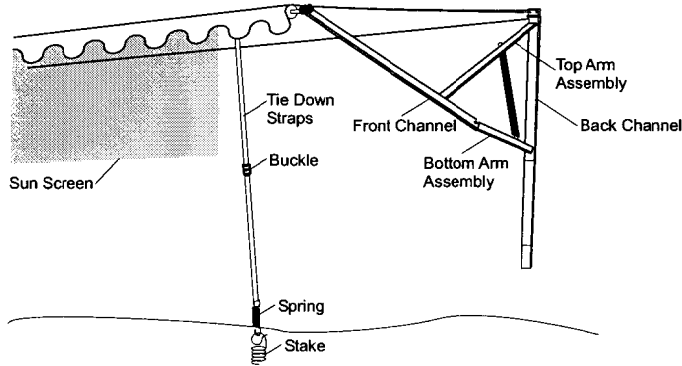

② Extend Awning

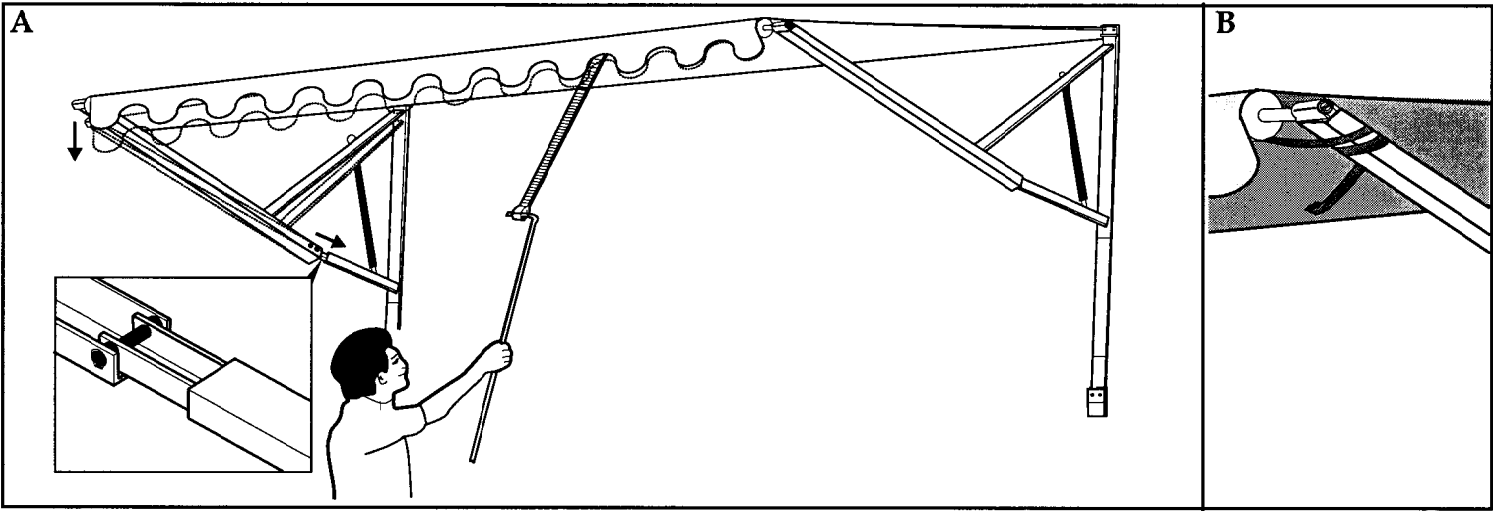


Hook the pull rod into the loop of the pull strap and pull the awning out. Slide the pull strap to the right end of the roller tube.

Optional Sunscreen

Your A & E awning also comes with a sunscreen. You will find it very helpful when awning side of RV is facing west in the late afternoon. It will provide great enjoyment when the sun is setting.

Slide sunscreen in open groove in roller tube on left end. Place in desired position.

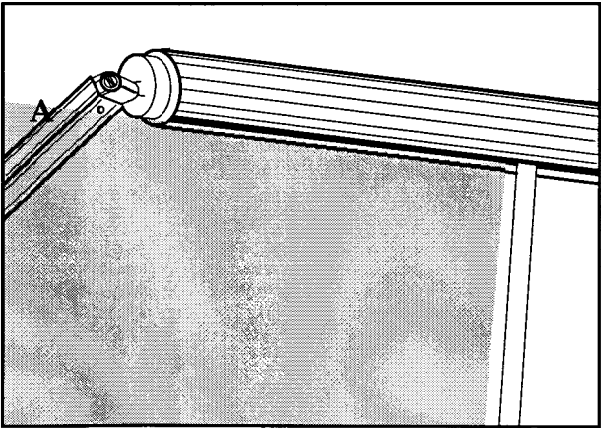

Rear Arm

Your A & E awning is designed to shed water if left out in the rain. The rear arm will automatically decrease the awning height approximately 9 inches when it is raining. When there is no longer the need to shed water it will return to the normal height. See FIG.2A.

⚠ CAUTION

THE A&E TWO STEP AWNING IS EXTREMELY DURABLE AND CAN BE OPERATED DURING MODERATE RAIN AND WIND CONDITIONS. HOWEVER, WHEN PERIODS OF HEAVY RAIN AND/OR WIND IS EXPECTED THE AWNING SHOULD BE CLOSED AND IN THE LOCKED POSITION. DAMAGE CAUSED BY WIND AND RAIN IS NOT COVERED BY WARRANTY.