


1. Removing Cover

- Remove the two (2) screws in the center support bracket. See FIG. 1.
- Remove the four (4) hex head bolts in the cover. See FIG. 1.
- Grasp the cover at the bottom edge near one end of the torsion brackets and pry the cover up approximately 1-2" with one hand while holding the torsion bracket with the other hand. Repeat the same process at the other end and continue lifting the cover until it can be fully removed. See FIG. 1.

FIG. 1

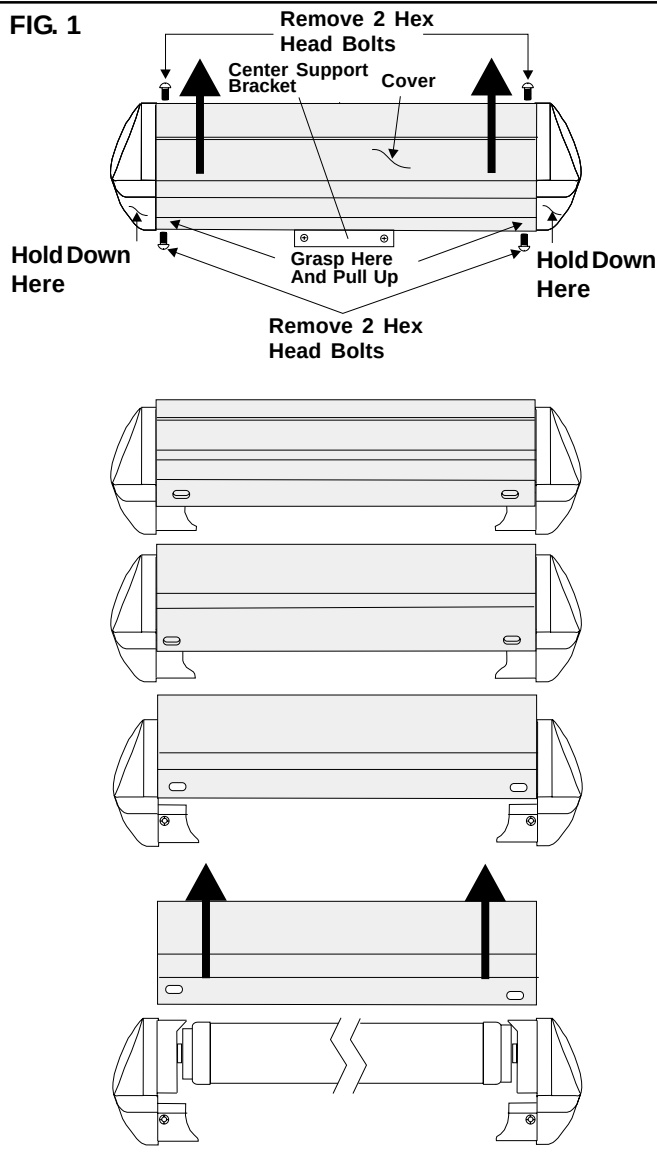

2. Replacing Cover

- Place cover on awning. Roll cover downward and push it straight onto the torsion brackets until it "snaps" into place. See FIG. 2. To avoid being pinched, keep fingers and hands away from the area between the cover and the torsion brackets.

CAUTION

Pinch Point. Keep fingers and hands away from the area between the cover and torsion brackets.

- Adjust cover from side to side if necessary. Equally space the distance between the cover and the torsion bracket on both ends.
- Secure cover to torsion bracket using four (4) hex head bolts removed in step 1. See FIG. 2.
- Secure center support bracket using screws removed in step 1.

FIG. 2

