



RECORD THIS UNIT INFORMATION FOR
FUTURE REFERENCE:
Model Number _____
Serial Number _____
Date Purchased _____

Kit, Top Adapter 4.88 Radius Part No. 3108907.068#

ae **POWER** *Patio Awning*

USA
SERVICE OFFICE
Dometic Corporation
2320 Industrial Parkway
Elkhart, IN 46516
574-294-2511

CANADA
Dometic Corporation
46 Zatonski, Unit 3
Brantford, ON N3T 5L8
CANADA
519-720-9578

**For Service Center
Assistance Call:**
800-544-4881

⚠ WARNING

This manual must be read and understood before installation, adjustment, service, or maintenance is performed. This unit must be installed by a qualified service technician. Modification of this product can be extremely hazardous and could result in personal injury or property damage.

⚠ AVERTISSEMENT

Assurez-vous de lire et de comprendre ce manuel avant de procéder à l'installation, à des réglages, à de l'entretien ou à des réparations. L'installation de ce produit doit être effectuée par un réparateur qualifié. Toute modification de ce produit peut être extrêmement dangereuse et entraîner des blessures ou des dommages matériels.

INSTALLATION INSTRUCTIONS

Model **3108907.068#**

SAFETY INSTRUCTIONS

This manual has safety information and instructions to help users eliminate or reduce the risk of accidents and injuries.

RECOGNIZE SAFETY INFORMATION



This is the safety-alert symbol. When you see this symbol in this manual, be alert to the potential for personal injury.

Follow recommended precautions and safe operating instructions.

UNDERSTAND SIGNAL WORDS

A signal word, **WARNING** OR **CAUTION** is used with the safety-alert symbol. They give the level of risk for potential injury.

⚠ WARNING indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.

⚠ CAUTION indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.

CAUTION used without the safety alert symbol indicates, a potentially hazardous situation which, if not avoided, may result in property damage.

Read and follow all safety information and instructions.

Installation Instructions

For 895100X.400# Hardware

This Kit Contains:

2 -	3108907.076#	Adapter, Top 4.88" Radius
4 -	3108708.094	1/2" Foam Spacer
4 -	3312048.055#	Spacer, Back Channel
4 -	3104499.045	Screw, S14-10 x 1" HHW
4 -	3104176.155	Screw, Hexcap 1/4-20 x 1" SS
4 -	317534.006	Nut, Lock w/Insert 1/4-20 SS
8 -	3104499.003	Screw, S14-10 x 1.50" SS
6 -	317228.008	Wire Tie, Black
1 -	3312059.000	Installation Instructions

Important: Read and understand all of the following steps before beginning installation.

This kit is designed to fit a 4.88" side wall radius for the top mounting bracket and will space the hardware 1/2" from side wall. Follow the installation instructions provided with the hardware and add the following steps:

1. Before installing hardware, mount the 4.88" radius top adapter to the top mounting bracket using the 1" x 1/4-20 screws and 1/4-20 lock nut provided with this kit.
2. Place two foam spacers on each back channel at positions shown in Figure 1. The bottom foam spacer will be located 2" above the bottom mounting holes. The middle spacer will be located 2" above the middle mounting holes. These foam blocks can be removed later (if desired) after the aluminum back channel spacer blocks are installed. See Fig. 1 & 2
3. With the top radius adapter secured on the top mounting bracket, hold the arm assembly at desired position and mark location of holes in top adapter. Secure top adapter to side wall using two (2) 1" x S14-10 screws provided with this kit.

Important: Structural backing is required where mounting screws will be installed through side wall for securing top adapter and middle and lower spacers.

⚠ WARNING

The following step involves opening the hardware. The hardware is spring loaded. Extreme caution must be used when removing the tie wires. Two people are required when performing the following step.

4. With one person holding the hardware closed, the other person should carefully remove the hardware tie wraps. When the tie wraps are removed, both people should carefully open the hardware to access the middle and bottom holes. See Fig. 2
5. With the middle and bottom mounting holes now visible, slide the back channel spacer blocks behind the mounting holes and secure the hardware to the wall using the S14-10 x 1.50" mounting screws provided.

⚠ WARNING

The following step involves opening the hardware. The hardware is spring loaded. Extreme caution must be used when removing the tie wires. Two people are required when performing the following step.

6. With two people, push the hardware closed. With one person holding the hardware closed, the other person must secure the hardware using the provided wire ties.
7. Repeat on opposite side. Make wiring connections according to the instructions provided with the hardware.

FIG. 1

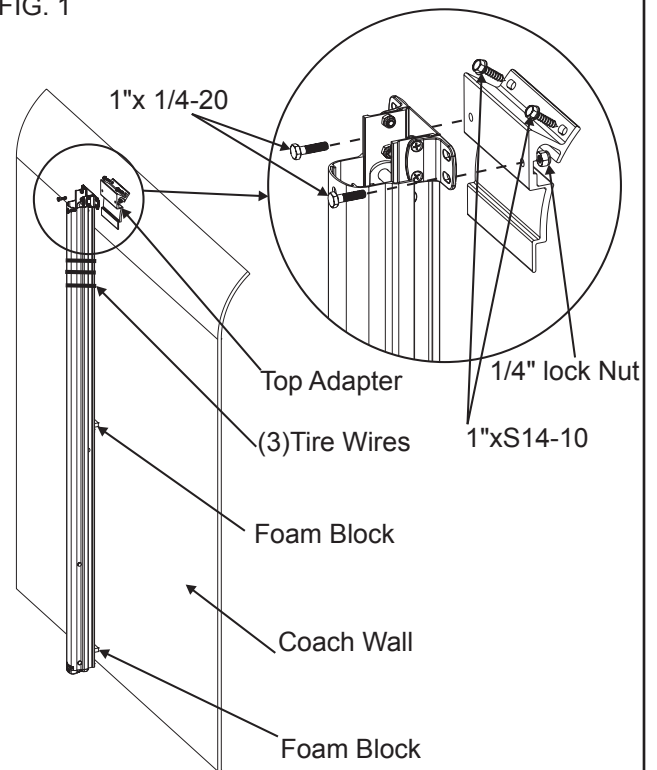


FIG. 2

