



Filter Replacement Kit
3313092.000
for
Condensate Pump Kit 3312328.002

SAFETY INSTRUCTIONS

This manual has safety information and instructions to help users eliminate or reduce the risk of accidents and injuries.

RECOGNIZE SAFETY INFORMATION



This is the safety-alert symbol. When you see this symbol in this manual, be alert to the potential for personal injury.

Follow recommended precautions and safe operating instructions.

UNDERSTAND SIGNAL WORDS

A signal word, **WARNING** OR **CAUTION** is used with the safety-alert symbol. They give the level of risk for potential injury.

WARNING Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.

CAUTION Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.

CAUTION When used without the safety alert symbol indicates, a potentially hazardous situation which, if not avoided, may result in property damage.

Read and follow all safety information and instructions.

GENERAL INSTRUCTIONS



These instructions must be read and understood before installation of this kit. This kit must be installed by a Dometic Service Center or a qualified service technician. Modification of this product can be extremely hazardous and could result in personal injury or property damage.

Tools Required:

Cordless Drill W/Phillips Bit
Needle Nose Pliers
5/16" Nut Driver

Kit Contains:

- 1 Suction Hose and Filter Assembly
- 1 3313086.000 Service Instructions

A. Precautions

1. Read instructions carefully before attempting to start installation.
2. Dometic, LLC will not be liable for any damages or injury incurred due to failure in following these instructions.

B. Requirements

1. The air conditioner unit should already have a condensate pump kit (part number 3312328.002) installed.

INSTALLATION INSTRUCTIONS

1. Disconnect all 120 VAC and 12 VDC power at their sources or at the breakers.




Disconnect 120 VAC. Failure to follow these instructions could create a shock hazard causing death or severe personal injury.

CAUTION

Disconnect the positive (+) 12 VDC terminal at the supply battery. Damage to equipment could occur if the 12 VDC is not shut off.


2. Remove outside shroud to expose the condenser and evaporator plastic covers.
3. Remove the screws that secure the plastic evaporator cover to the lower evaporator housing. See FIG. 1.

FIG. 1

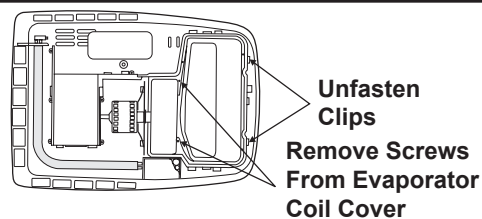

4. Unfasten clips and remove the evaporator cover exposing the lower evaporator housing and condensate pump. See FIG. 1.
5. Remove existing suction hose and filter assembly from pump. Using needle nose pliers grasp the assembly up close to the barbed fitting on the pump and pull gently to remove. See FIG. 2.

FIG. 2

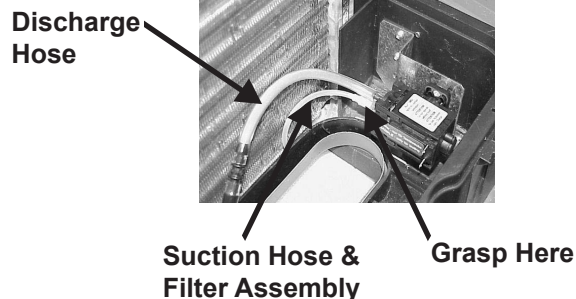

6. Install new suction hose and filter assembly. If lubricant is required to install, use water only. **DO NOT** use any petroleum base lubricants.
7. Place the suction hose under the evaporator coil. This is critical to the proper operation of the condensate pump.
8. Check all hose and wire connections for proper fit. Correct any loose, broken or shorted wiring.
9. Replace the evaporator cover removed in step four making sure it is sealed and all tabs are inserted and locked. Reinstall the two screws removed in step 3. Reinstall outer shroud.

USA
SERVICE OFFICE
Dometic, LLC
2320 Industrial Parkway
Elkhart, IN 46516
574-294-2511

CANADA
Dometic, LLC
46 Zatonski, Unit 3
Brantford, ON N3T 5L8
CANADA
519-720-9578

For Service Center Assistance Call:
800-544-4881