


NOTICE!

Clinch nut must be installed per manufacturers (AVK Industrial Products) specifications. Specifications are as follows:

1. Mounting Hole Specifications After All Finishes Applied

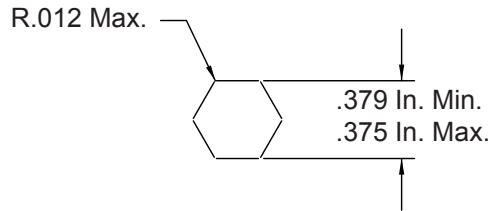

3313107.088 Kit, Svc Clinch Nut Contains:

- (10) 3108817.010 Clinch Nut, 1/4 - 20 Sealed
- (1) 3314164.000 Notice

2. Grip Range: .125 - .195

3. Performance

- a. Pushout Force: 2500 pounds
- b. Ultimate Rotation Torque: 7.3 Foot Pounds

4. Install with AVK AKPT9P420 Pneumatic Insert Tool with 70 PSI minimum air pressure. Follow all manufacturers safety instructions.

Installation outside these specifications will void all warranty and installer assumes all liabilities.

Form No. 3314164.000 10/11


©2011 Dometic, LLC

LaGrange, IN 46761

NOTICE!

Clinch nut must be installed per manufacturers (AVK Industrial Products) specifications. Specifications are as follows:

1. Mounting Hole Specifications After All Finishes Applied

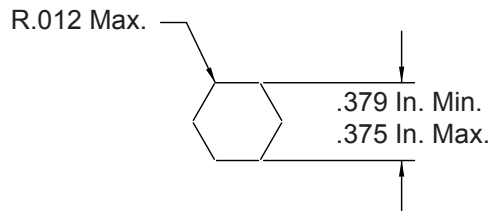

3313107.088 Kit, Svc Clinch Nut Contains:

- (10) 3108817.010 Clinch Nut, 1/4 - 20 Sealed
- (1) 3314164.000 Notice

2. Grip Range: .125 - .195

3. Performance

- a. Pushout Force: 2500 pounds
- b. Ultimate Rotation Torque: 7.3 Foot Pounds

4. Install with AVK AKPT9P420 Pneumatic Insert Tool with 70 PSI minimum air pressure. Follow all manufacturers safety instructions.

Installation outside these specifications will void all warranty and installer assumes all liabilities.

Form No. 3314164.000 10/11

©2011 Dometic, LLC

LaGrange, IN 46761