

DOMETIC

REFRIGERATION

REFRIGERATOR

EN

Absorption Refrigerators Door Latch Strike Covers Service Kit Installation

Please read these instructions carefully.

Contents of Service Kit

Four (4) Adhesive Backed Covers

USA & Canada

Service Office
Dometic Corporation
1120 North Main Street
Elkhart, IN 46514

Service Center & Dealer Locations

Visit:
www.dometic.com

We have been able to identify a visual cosmetic defect that has occurred on our Dometic DM2652 refrigerators up in the freezer compartment. This does **NOT** occur on all units but may be present on units with serial numbers starting with MB between 805xxxxx and 820xxxxx.


This visual cosmetic defect in no way affects the performance, operation, safety, or function of the refrigerator. This visual cosmetic defect does **NOT** represent a non-compliance issue to one or more of the FMVSS standards or result in a risk of personal injury, death, vehicle crash, or property damage.

The visual cosmetic defect is that extra door latch strike openings have been punched in the refrigerator frame, and during the assembly process the extra door latch strikes were not installed (please see the illustrations below.) The foam sealing strip, required by ANSI/NFPA 1192 and ANSI Z21.19, is provided to seal the refrigerator against the cabinetry when it is installed into the RV. Although the omission of the door latch strikes leaves small cosmetic openings that can be seen visually, the foam sealing strip located behind the door latch strike openings at the freezer provides a seal to maintain complete separation of the combustion system from the interior atmosphere of the recreational vehicle, as stated in ANSI/NFPA 1192.

1 INSTALLING THE ADHESIVE BACKED COVERS

i The refrigerator does **NOT** require uninstallation to make this repair, and the use of tools is **NOT** required.

- Remove one adhesive backed cover from the paper backing and install the cover over one of the door latch strike openings using the following guidelines:
 - The area in which the adhesive backed cover will be applied must be clean and free of any residue that will impact the ability of the cover to adhere properly.
 - The adhesive backed cover must completely cover the door latch strike opening and extend towards the front edge of the refrigerator frame by at least 1/16".
 - The adhesive backed cover must be centered vertically over the door latch strike opening.
- Once the cover is in place, apply light pressure across the surface of the cover to ensure that the cover firmly adheres to the refrigerator frame.

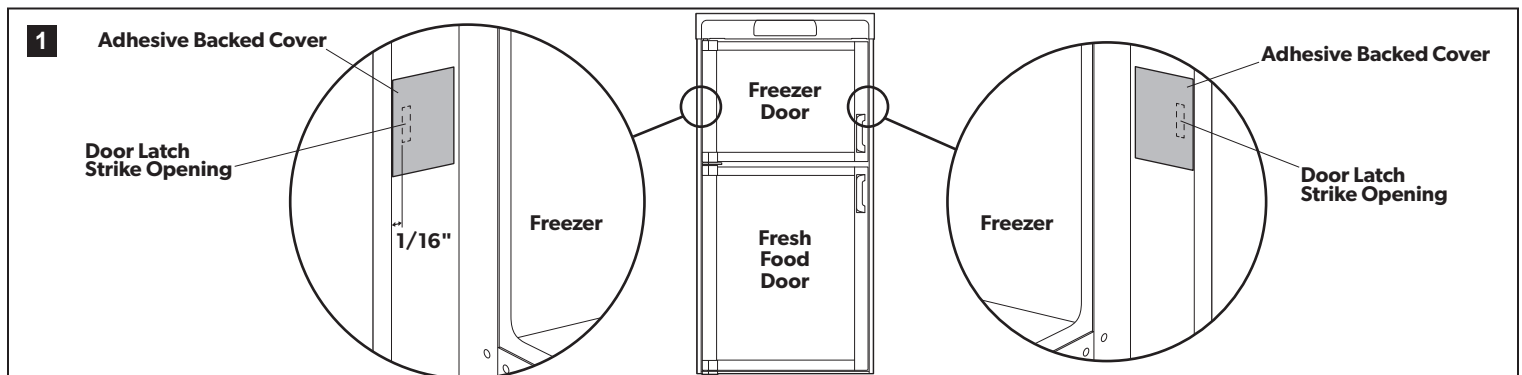

i Extra adhesive backed covers are included. If for any reason the adhesive backed cover is installed improperly, remove the cover and install a new adhesive backed cover. The adhesive backing on the cover is intended for a one-time application only.