


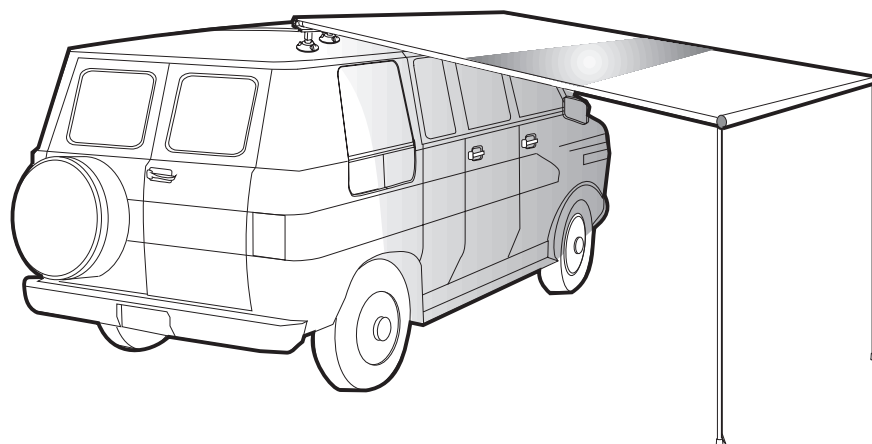

INSTALLATION & OPERATING INSTRUCTIONS

MODEL
AVX07

APPLICATION:

This Awning is designed and intended for mounting on vans, minivans, sport utility vehicles, small trucks and automobiles.

IMPORTANT: Read the entire installation procedure before starting the installation.

NOTE: Electrolux assumes no liability for damages or injury resulting from installation or operation of this product.

TO MOUNT ON VEHICLE ROOF:

1. Attach suction cups to the header rail.
Slide the suction cup assemblies into the header rail to the desired position and hand-tighten. See FIG. 1.
2. Set the assembled awning on top of your vehicle. Adjust the position of the suction cups if necessary. Press down on header rail above each suction cup to seal them to the vehicle. See FIG. 2.

ATTENTION: For the best seal, the roof of the vehicle must be clean and the suction cups must be moistened.

3. ATTACH RETAINER STRAPS:

Step 1: The retainer straps have a fixed end and an adjustable end. The strap can be made shorter or longer by pulling the free end of the adjustable loop out of the hollow core of the rope and reinserting it in a new location.

Be sure to insert the free end through 3" to 4" (8-10 cm) of the hollow core of the rope. The hollow core of the rope is exposed by pushing together a short section of the rope. (See FIG. 3A)

Step 2: Attach the fixed ends of the straps to the rear suction cup posts. (See FIG. 3B).

ATTENTION: For proper function the straps must be attached only to the **REAR** suction cups.

Step 3: Firmly attach the adjustable ends of the straps to the opposite side of the vehicle. The way the strap is attached will depend on the vehicle. (See FIG. 3C for an example of attachment methods).

Tighten the straps by pulling on the free end of the adjustable loop.

4. Have one person unroll the awning and hold the end off the ground, while a second person completes the setup of the awning. Insert pin of rafter pole through the eye of the adjustable pole and through hole in the roller tube. (See FIG. 4.)
5. Compress the rafter poles by placing the end of the rafter against the header rail near the middle and sliding toward the end of the awning until the fabric is tight. (See FIG. 5)
6. To raise awning, twist lower adjustable pole while holding upper pole and raise awning to desired height. Twist lower pole to lock in position. (See FIG. 6).
7. The awning poles should be staked to the ground by inserting the included tent stakes through the wire loops at the bottom of the awning poles.

TO MOUNT ON VEHICLE WALL:

! CAUTION

VERTICAL WALL MUST BE SMOOTH METAL, GLASS OR PLASTIC SUCTION CUPS TO STICK SAFELY. SUCTION CUP MOUNTS ARE NOT PERMANENT. REGULARLY CHECK AND RE-COMPRESS CUPS TO ASSURE A FIRM MOUNTING.

Follow the standard instructions with the following exceptions:

2. Attach assembled awning to the wall or window. Press the header rail above each suction cup to seal them to the wall.
ATTENTION: For the best seal, the wall must be clean and the suction cups must be moistened.
5. Place one plastic spacer inside each rafter assembly. (FIG. 7) Compress the rafter poles and place the end of each rafter against the bottom of the header rail. (FIG. 8)

! CAUTION

IN WINDY CONDITIONS, OR IF LEAVING AWNING UN-ATTENDED, THE AWNING SHOULD BE CLOSED TO PREVENT DAMAGE.

TO CLOSE AWNING:

1. Reverse Steps 3 through 7.
2. Release all the suction cups by pulling up on the rubber tab. Remove the awning assembly from the vehicle.
3. Loosen the suction cup assemblies and slide them out of the header rail.

To repack the awning in the storage bag:

- A. Make sure the fabric is rolled up as tightly as possible.
- B. Lay the poles and rafters in the bottom of the bag.
- C. Lay the awning assembly in the bag.
- D. Place two suction cup assemblies in each end of the bag.
- E. Store the retainer straps, tent stakes and instructions in clear plastic envelopes, place in bag and zip bag closed.

! CAUTION

DO NOT MOVE VEHICLE WHILE AWNING IS ATTACHED TO THE ROOF.

FIG. 1

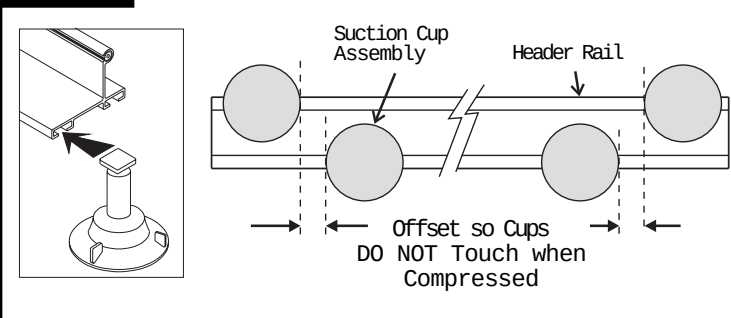


FIG. 2

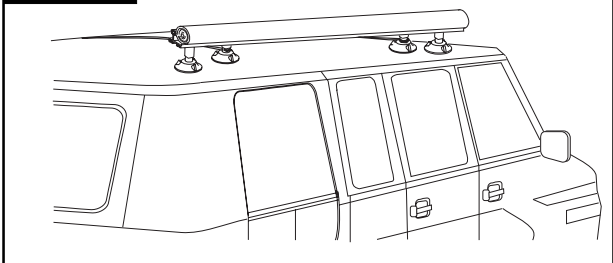


FIG. 3A

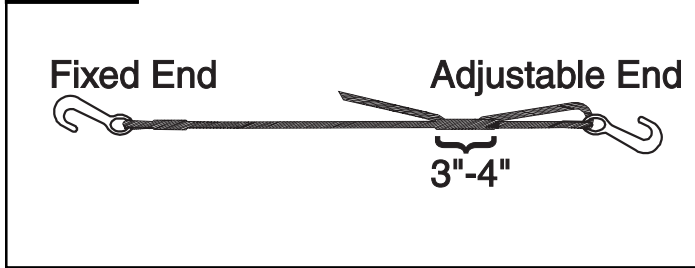


FIG. 3B

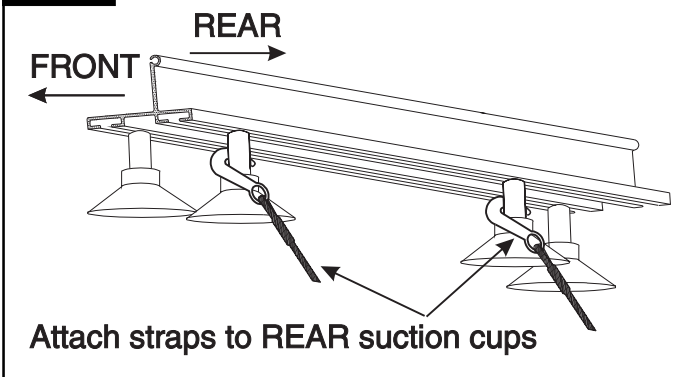


FIG. 3C

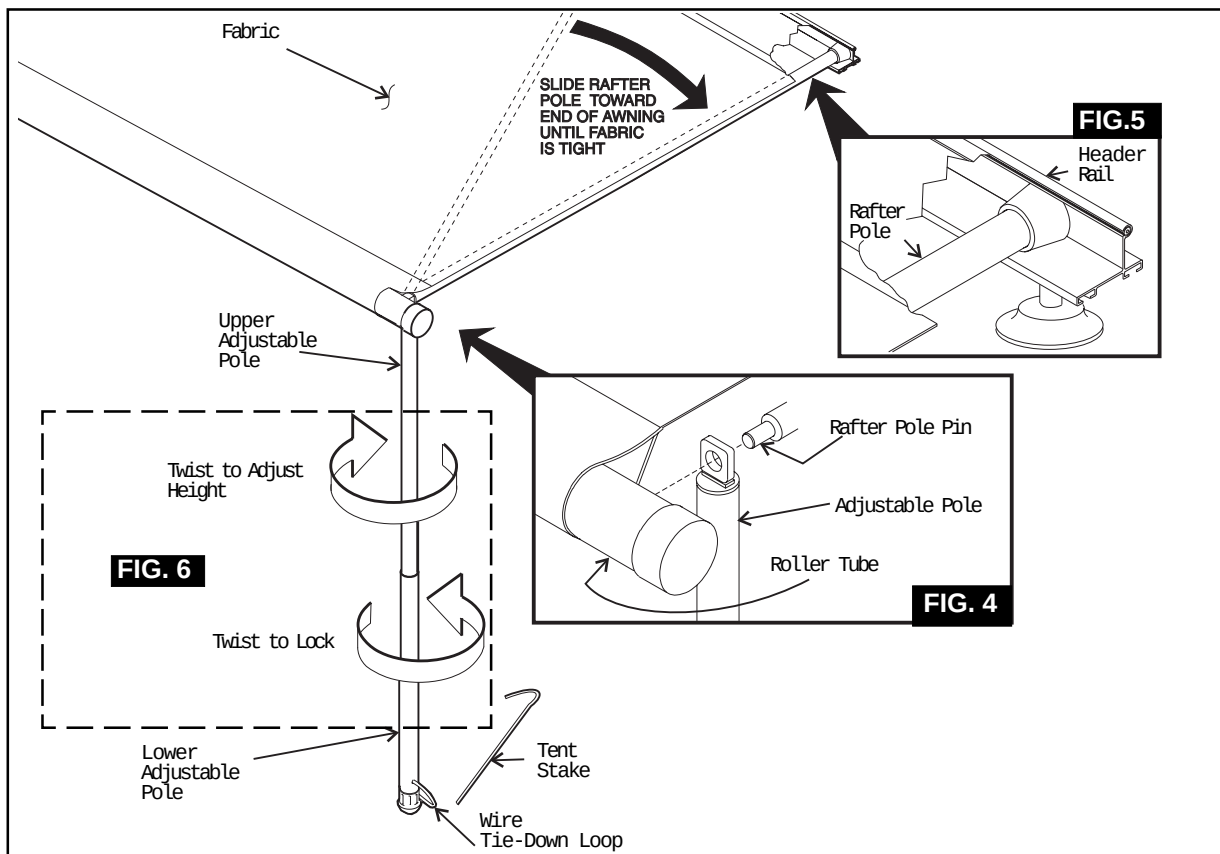
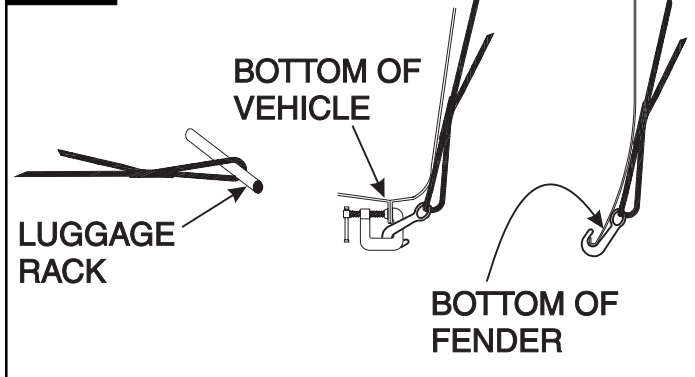


FIG. 6

FIG. 5




FIG. 4

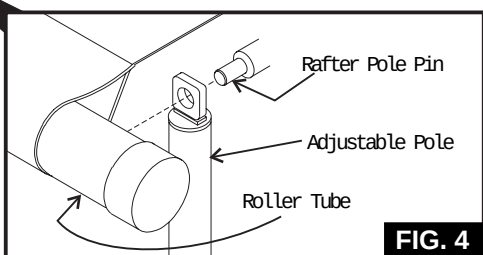


FIG. 7

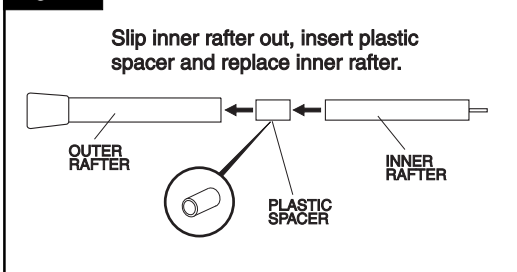


FIG. 8

