




March 9, 2006

Memo: HDI-03-09-2006

To: All Installers

Subject: Reprogramming of Key Fob for HDI #98013 Remote Control Kits


Step 1: The key fob can be programmed by simply pressing the programming button momentarily for approximately 1 second (located at the right corner of the module).
This will enable the programming mode for 15 seconds (see below).

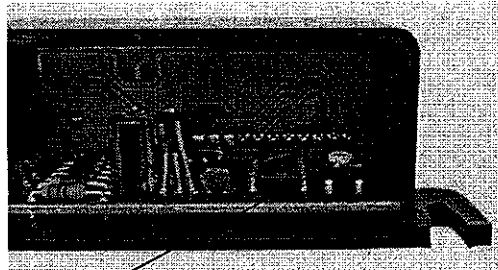

Programming Button

Step 2: Press key fob button number 1 (this button has one dot) for approximately 1 second (see below).

(Please note: Key fob button should be pressed within 15 seconds of the programming mode enabled by pressing the button on the module)

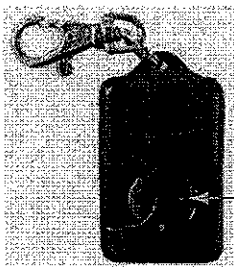

Button #1

Step 3: Release button, wait 15 seconds.

Step 4: Confirm the operation of the key fob. If the key fob fails to operate, repeat Steps 1 through 3.

*** Please Note:** In the event of a lost key fob, press the programming button on the module for 15 seconds and all previously programmed key fobs will be cancelled. To program replacement key fobs, follow Steps 1 through 3.



Hamsar DIVERSCO INC.

Hamsar Diversco Inc., 5320 Downey Street, Burlington, Ontario L7L 6M2

Tel: (905) 332-4094 / Fax: (905) 332-9020 / Toll Free: 1-800-567-5483

Email: sales@hamsar.com www.hamsar.com

