

English

Safety instructions

- 
- CAUTION! Failure to obey these cautions could result in minor or moderate injury.**

 - > This device may only be repaired by qualified personnel. Inadequate repairs can lead to considerable hazards. Contact an authorized service center in case of repair.
 - > Maintenance shall only be performed as recommended by the equipment manufacturer.
 - > Electronic devices are not toys. Keep electrical appliances out of reach of children or infirm persons. Do not let them use the appliances without supervision.

Intended use

The Dometic drain kit is designed for and may only be installed on the following Dometic models (hereinafter referred to as "unit," or "product") only:

- FjX7337iHP* (Freshjet FjX 7 Pro)
- FjX7457iHP* (Freshjet FjX 7 Plus)
- FjZ7437iHP* (Freshjet FjZ 7 Pro)
- FjZ7557iHP* (Freshjet FjZ 7 Plus)

The drain pans must be installed before the air conditioner roof section is bolted down.

This product is only suitable for the intended purpose and application in accordance with these instructions.

This manual provides information that is necessary for proper installation and/or operation of the product. Poor installation and/or improper operation or maintenance will result in unsatisfactory performance and a possible failure.

The manufacturer accepts no liability for any injury or damage to the product resulting from:


- Incorrect installation, assembly or connection
- Incorrect maintenance or use of spare parts other than original spare parts provided by the manufacturer
- Alterations to the product without express permission from the manufacturer
- Use for purposes other than those described in this manual



NOTE Use only the screws provided in the kit.

Dometic reserves the right to change product appearance and product specifications.

Scope of delivery

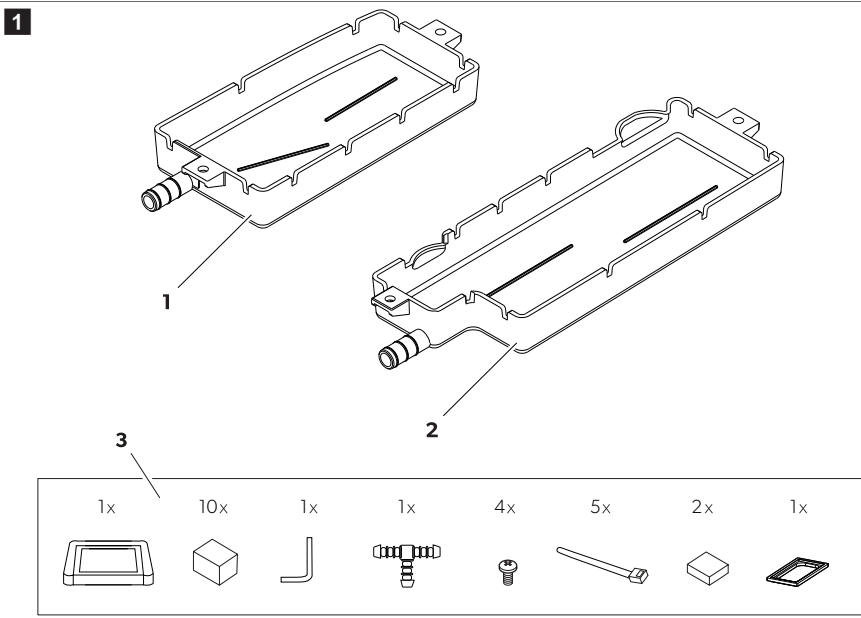

No. in  Fig. 1 on page 1	Quantity	Description
1	1	A shorter drain pan.
2	1	A longer drain pan.
3	1	Higher sponge gasket
	10	Higher sponge feet
	1	Drain tube
	1	Tee connector
	4	Screws
	5	Cable tie
	2	Drain tube fixing sponge
	1	Extension air duct

Installation


1. Place the AC unit upside-down or rotate the unit 90 ° on a clean and stable work surface.

- 
- NOTICE! Damage hazard.**


 - > Ensure the top cover (shroud) is protected.
 - > Do not slide the unit.

2. Reserve sufficient space for the drain pans and drain tubes routing.

3. Replace the original mounting plate sponge gasket provided in the ADB kit with a higher sponge gasket.

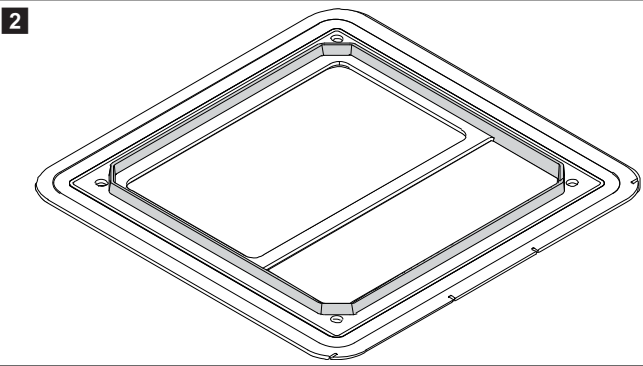


4. Identify the two drain pans.
5. Remove the sponge feet to reserve enough space for the drainage tube.

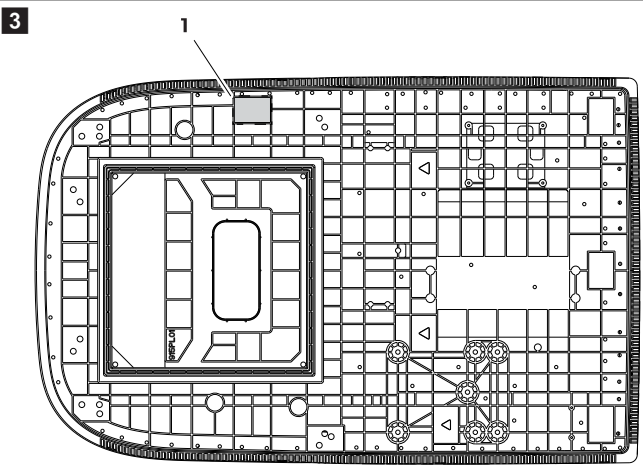


6. Ensure the drain holes on the base pan of the roof section are clear before mounting the drain pan kit.
7. Mount the two drain pans on the base pan using screws provided in the drain pan kit.



NOTE Fit the drain pans tightly against the base surface and ensure the drain outlet faces the exit direction.

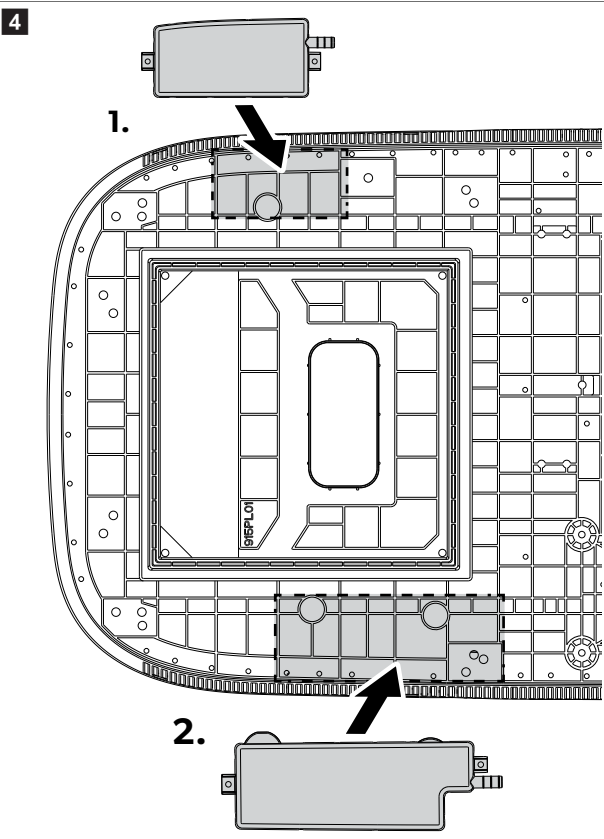

8. Secure the two drain pans with screws provided in the kit.
9. Replace the original sponge feet in the following positions with higher ones.

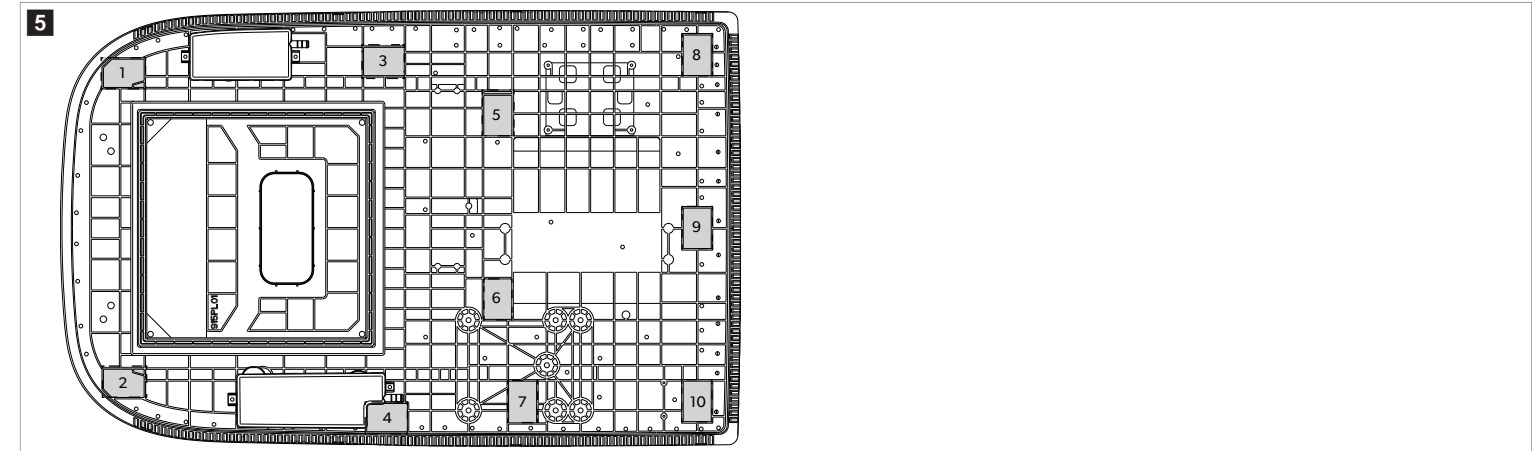


10. Connect drain tubes to each drain outlet and secure with the provided cable ties.
11. Route tubes along the designated path on the base pan as shown in  Fig. **6** on page 2.
12. Use the tee connector provided in the kit to combine the drain tubes, and use the five cable ties to fasten the drain tubes with water flow channel.



NOTE

- Keep hoses level and straight. Trim hose if necessary to ensure proper routing.
- Do not create upward bends.

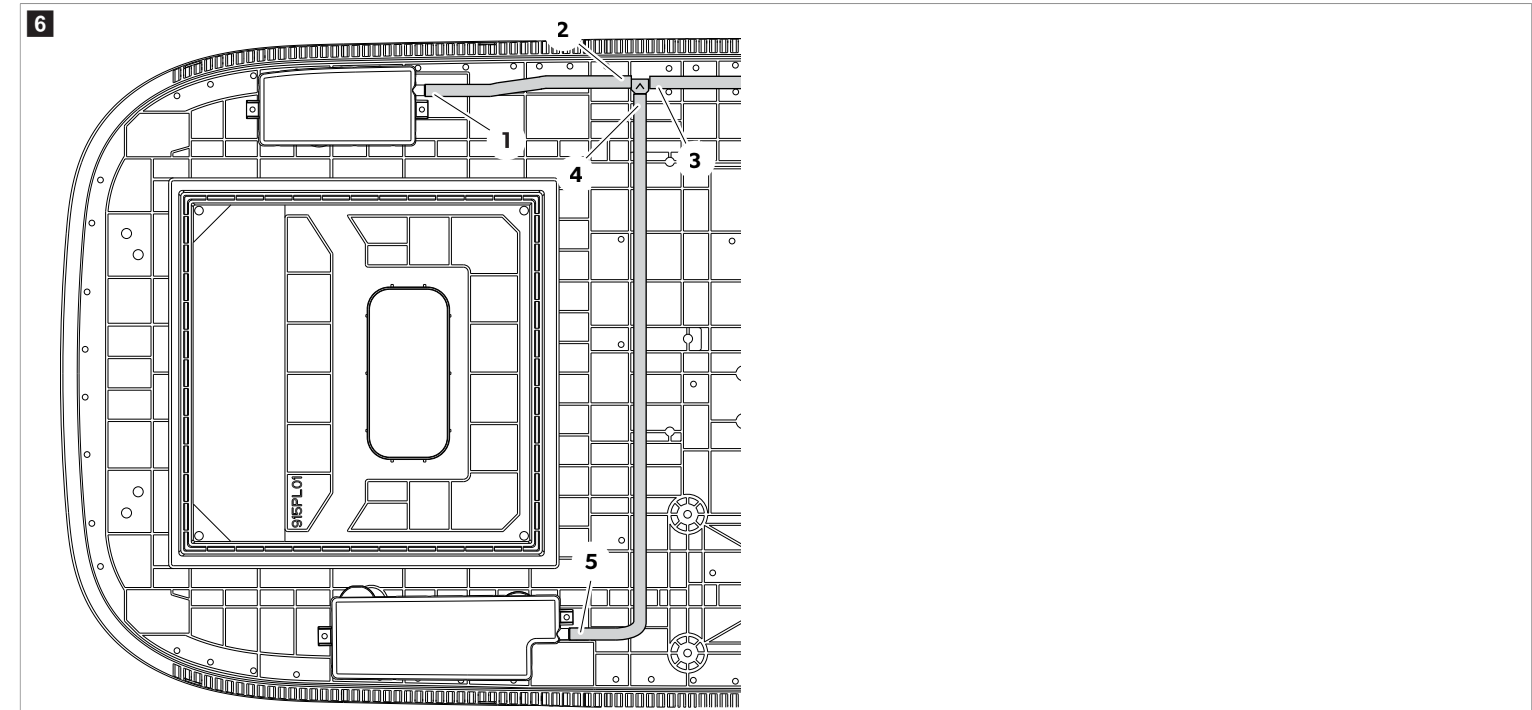


13. Paste the drain tube fixing sponge on any location of the drain tube to help attach the tube to base pan.
14. Ensure to use reliable roof and gutter sealant.



NOTE Sealant is not in the scope of delivery.

15. Ensure the molded water flow channels on the drain pans are correctly oriented as shown in  Fig. **4** on page 1.
16. Fit the roof section onto the mounting plate.
17. As the air conditioner now sits higher on the roof, it is necessary to ensure enough duct spacers are used when mounting the ADB inside the vehicle.
- There are 4 spacers in the standard ADB kit and the drain pan kit provides an extra spacer if needed. Do not leave any gaps between the roof section of the air conditioner and the ADB.

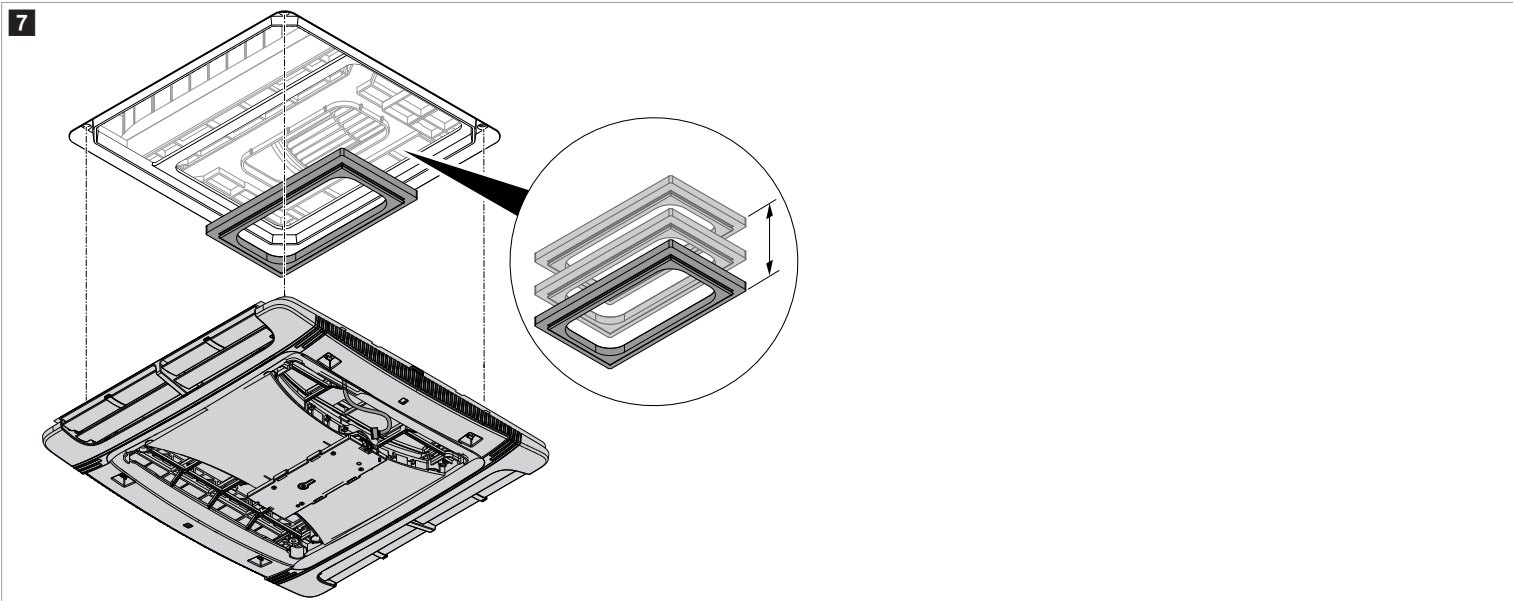

18. Install the unit onto the roof following standard installation procedures.
19. Verify the following:

- The two drain pans are installed
- Drain outlets point outward
- Tubes are level and no upward bends
- All required sealing points are sealed
- Drain pan edges remain unsealed

Operation



CAUTION! Risk of injury

- > Only operate the device if you are certain that the housing and the cables are undamaged.
- > If the cooling device's power cable is damaged, it must be replaced with a suitable power cable or assembly available from the manufacturer or its service agent to prevent safety hazard.

After proper installation the drain pan functions normally.

Disposal



Recycling packaging material: Place the packaging material in the appropriate recycling waste bins wherever possible. This separation is necessary, as packaging is valuable resource and improper disposal may impact human health and the environment.



The crossed-out wheeled bin indicates that the product is electrical or electronic equipment and must be collected separately for proper treatment, recovery, and recycling. **The consumer is legally obliged to dispose of properly any electrical or electronic equipment, separately from general household waste!**

This separation is necessary, as electrical appliances are valuable resources and may contain substances that are harmful to humans and the environment.

To finally dispose of the product, ask your local recycling center or specialist dealer for details about how to do this in accordance with the applicable disposal regulations.

The product can be disposed free of charge.

Warranty

If the product does not work as it should, please contact your retailer or the manufacturer's branch in your country (see dometic.com/dealer). The warranty applicable to your product is 3 year(s).

Australia only

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. The benefits provided to you as the consumer by this warranty are in addition to other rights and remedies available to you under the law.

New Zealand only

This warranty policy is subject to the conditions and guarantees which are mandatory as implied by the Consumer Guarantees Act 1993(NZ).

Local support

Please find local support at the following link address: dometic.com/dealer



YOUR LOCAL DEALER
dometic.com/dealer

YOUR LOCAL SUPPORT
dometic.com/contact

YOUR LOCAL SALES OFFICE
dometic.com/sales-offices

A complete list of Dometic companies, which comprise the Dometic Group, can be found in the public filings of:
DOMETIC GROUP AB Hemvärnsgatan 15 · SE-17154 Solna · Sweden