


385-318714 "DO NOT FLUSH" PANEL INSTALLATION INSTRUCTIONS

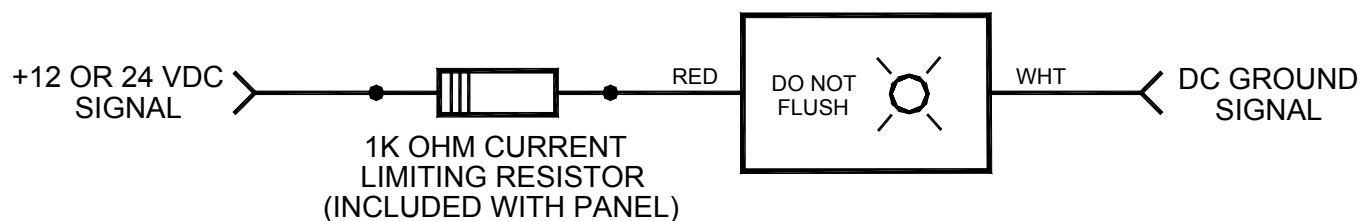


1. Mount panel in bathroom at eye level.
2. Use 18 gauge or larger stranded copper wire.
3. Follow wiring instructions provided with TankWatch system, VacuFlush toilet system, or consult factory for other applications.

NOTE: Some systems provide a positive (+) signal, while others provide a ground signal to turn the light on.

REVISION A
Form No. 600340544 11/17
©2017 Dometic Corporation

DOMETIC
Dometic Corporation, Sanitation Division
13128 State Rt. 226, P.O. Box 38
Big Prairie, OH 44611 USA
1-800-321-9886 • Fax: 330-496-3097
www.Dometic.com

385-318714 "DO NOT FLUSH" PANEL INSTALLATION INSTRUCTIONS

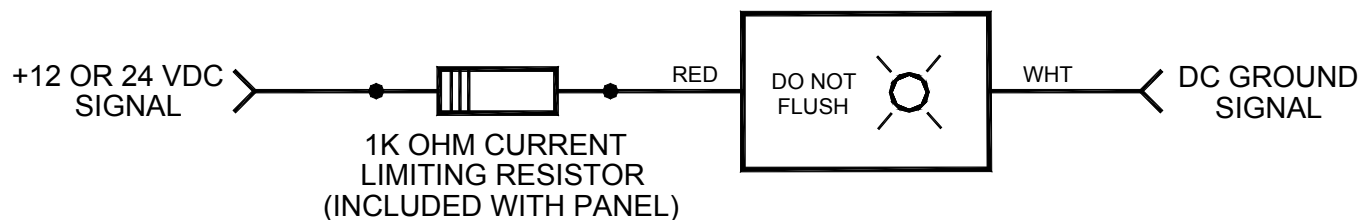

1. Mount panel in bathroom at eye level.
2. Use 18 gauge or larger stranded copper wire.
3. Follow wiring instructions provided with TankWatch system, VacuFlush toilet system, or consult factory for other applications.

NOTE: Some systems provide a positive (+) signal, while others provide a ground signal to turn the light on.

REVISION A
Form No. 600340544 11/17
©2017 Dometic Corporation

DOMETIC
Dometic Corporation, Sanitation Division
13128 State Rt. 226, P.O. Box 38
Big Prairie, OH 44611 USA
1-800-321-9886 • Fax: 330-496-3097
www.Dometic.com