


# ENDLESS BREEZE


U.S. PATENT #7419368

by FAN-TASTIC VENT

**WARNING!** NOT SUITABLE FOR USE WITH SOLID-STATE SPEED CONTROLS.

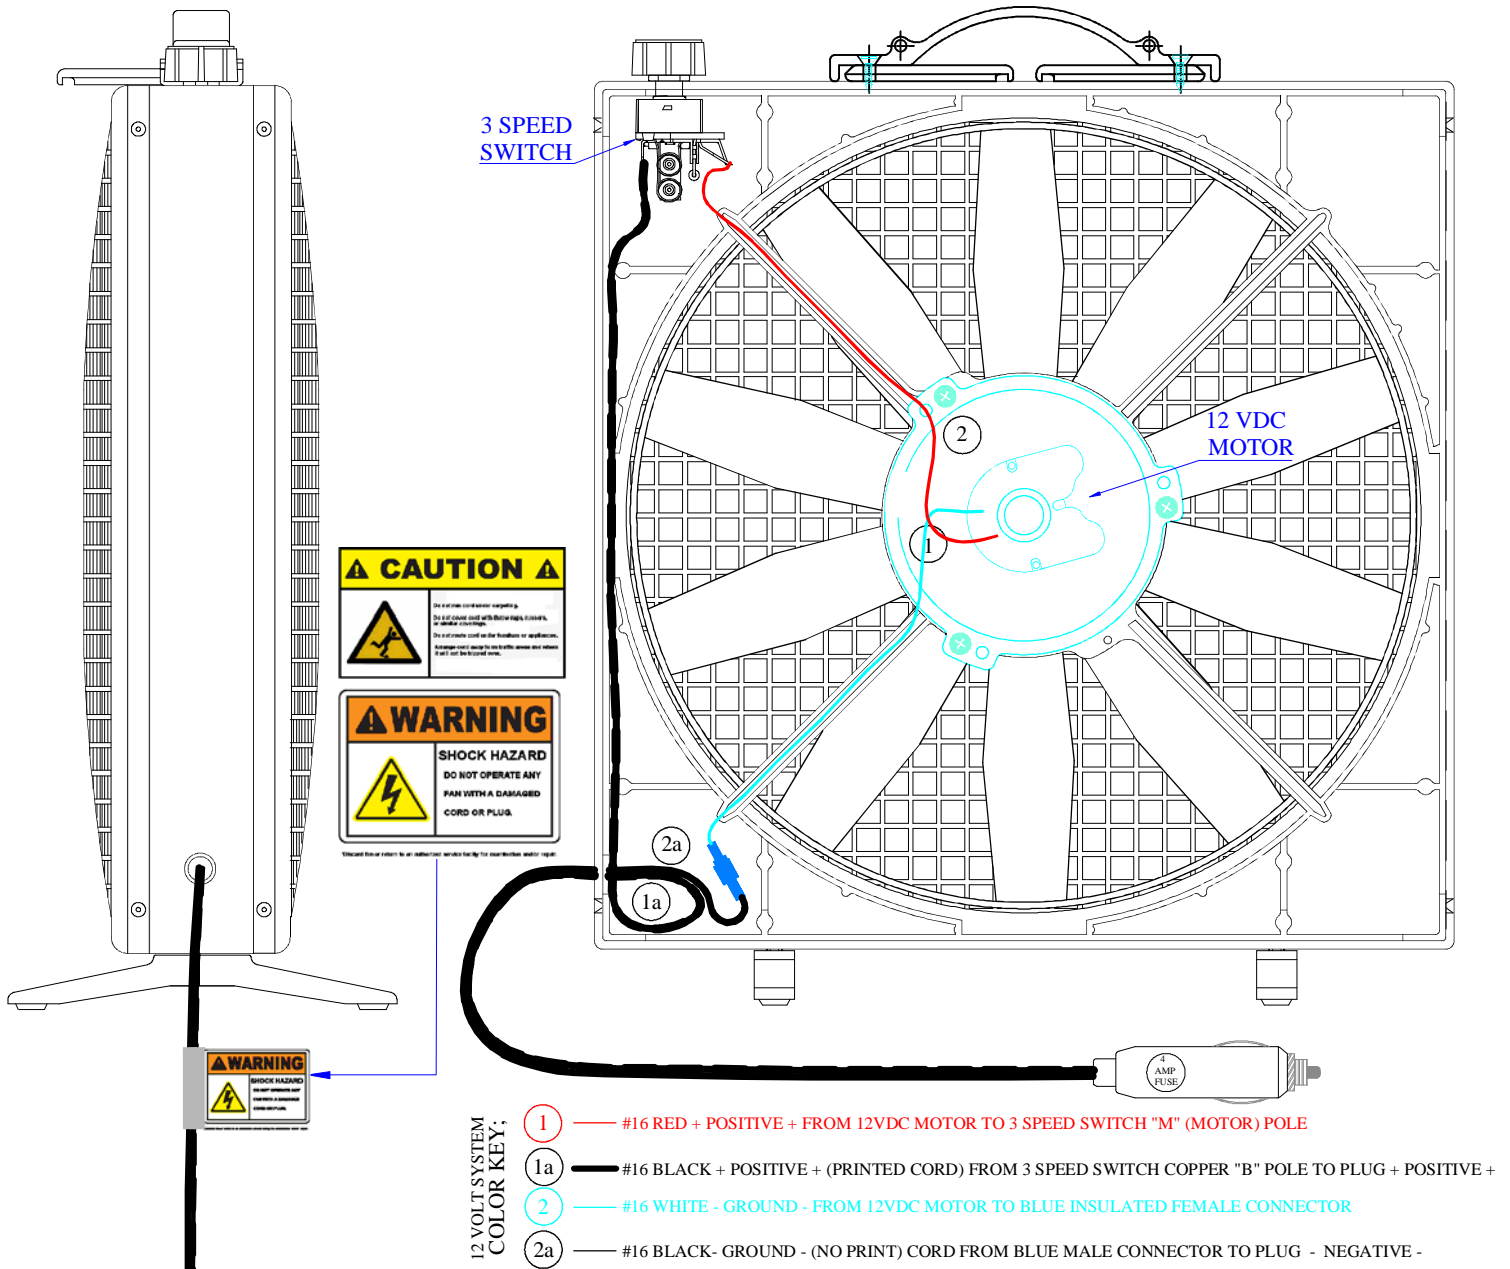

## FUSE REPLACEMENT

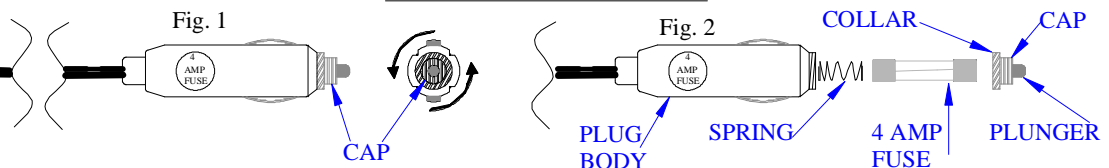

- Step 1. With the power cord unplugged, grab the plug body with one hand and unscrew the cap (Fig. 1) with the other in a counter-clockwise direction (right to left) until cap comes free of the plug and exposes the fuse.
- Step 2. Remove the fuse being careful not to lose the spring from within the cap.
- Step 3. Replace the blown fuse with a new 4 amp fuse.
- Step 4. Screw the cap back onto the plug in a clockwise direction (left to right) until snug. If properly installed the plunger cap will spring back into place when depressed.