

Dometic Tank Level Indicator Operation

TO BEGIN OPERATION

1. Twist white cap counterclockwise until it stops (A). Lift off cap.
2. Slide switch from OFF to TEST to assure fresh batteries and proper operation. In TEST mode, the "3/4 FULL" (left) and "FULL" (right) lights should illuminate. The "LOW BATT" (center) light will not illuminate. Slide switch to ON for operation. The level indicator can be turned off if the toilet will not be used for an extended time.
3. Replace white cap.

INDICATOR LIGHTS

When the holding tank level reaches about 3/4 full, the yellow "3/4 FULL" light illuminates.

When the holding tank reaches full, the red "FULL" light illuminates. The holding tank should be emptied before the toilet is used again. If holding tank fills up and indicator lights do not illuminate, the probe ends may need to be cleaned. See **CLEANING PROBES**.




When emptying the tank, the indicator lights may remain lit until the effluent drains from the sensing probes. If the indicator lights continue to remain lit after a few minutes, the probe ends may need to be cleaned. See **CLEANING PROBES**.

CLEANING PROBES

1. To remove probes from holding tank, twist off white cap and set aside.
2. Twist and pull black probe body up to remove from rubber grommet. After cleaning probes, be sure to put probe body into rubber grommet with the word "TOP" toward back of tank (B).

BATTERIES



When the batteries become weak, the red "LOW BATT" light will illuminate. Replace with AA alkaline batteries, making sure to position new batteries as shown.

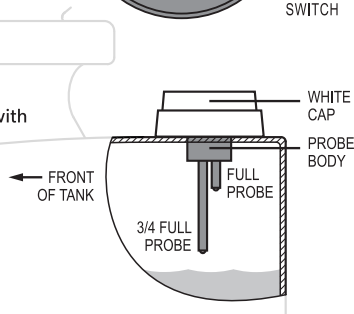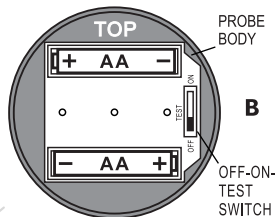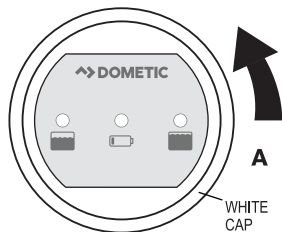

Dometic Tank Level Indicator Installation

Install on top flat surface of holding tank where accessible and white cap does not extend beyond edge of tank.

1. Drill a 2.5-inch (64 mm) hole in flat spot on top of holding tank with a hole saw. Make sure to remove remnants from inside of tank.
2. Insert rubber sealing grommet into hole.
3. Lubricate inside surface of sealing grommet and outside surface of probe body with liquid dishwashing detergent.
4. Insert level indicator into sealing grommet. Level indicator will fit snugly.
5. Begin operation by following directions on other side of this sheet.

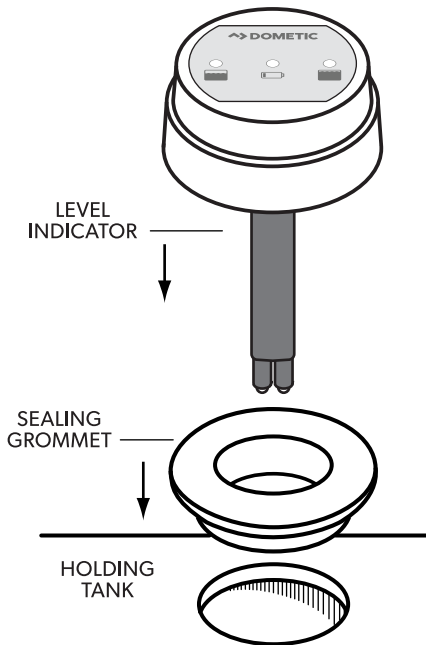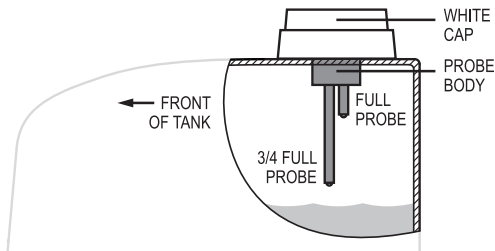

Dometic Corporation
13128 State Rt 226
Big Prairie, OH 44611
1-800-321-9886

© Dometic Corporation
600345381