

INSTALLATION INSTRUCTIONS

Dometic Model DMW13MW & DMW13MB Microwave

for Built-in Mounting Kit

Kit consists of:

Kit Number	Item	Part Number	Qty	For Use With
3108034.004W (WHITE)	Upper Trim	4948W1A005E	1	DMW13MW
	Lower Trim	4918W1A006E	1	
	Duct	5208W2A004A	1	
	Tapping Screw 4mm x 16mm	1SPTG04031A	4	
	Tapping Screw 4mm x 12mm	1TTL0402816	7	
3108034.004B (BLACK)	Upper Trim	4918W1A005F	1	DMW13MB
	Lower Trim	4918W1A006F	1	
	Duct	5208W2A004A	1	
	Tapping Screw 4mm x 16mm	1SPTG040317	4	
	Tapping Screw 4mm x 12mm	1TTL0402816	7	

Electrical Requirements:

Observe all governing codes and ordinances. A 120 Volt, 60hz, AC only 15 or 20 AMP fused electrical supply is required. (Time Delay Fuse Is Recommended). It is recommended that a separate circuit serving only this appliance be provided.


WARNING: The appliance must be disconnected from the source of supply before attempting the installation of this kit. The kit is intended for use only with the above designed models.

Grounding Instructions:

WARNING: Improper use of this grounding plug can result in a risk of electrical shock. **DO NOT, under any circumstances, remove the power supply cord grounding prong.**

For your personal safety, this appliance must be grounded. In the event of an electrical short circuit, grounding reduces the risk of electrical shock by providing an escape wire for the electric current. This appliance is equipped with a polarized 3-prong grounding plug.

FIG. 1

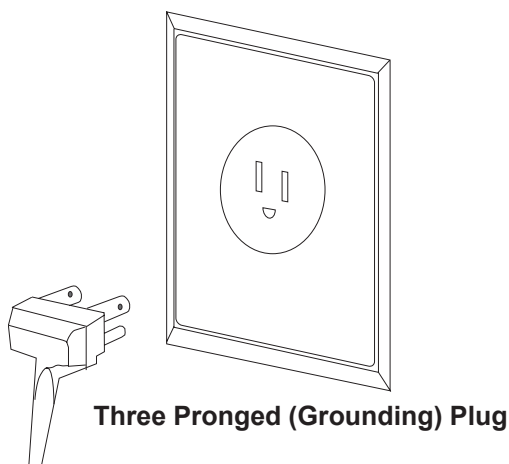

It must be plugged into a correct polarized mating 3-prong grounding type wall receptacle, properly installed and grounded in accordance with national

electrical codes and if mating wall receptacle is not available or if you are not sure if the wall receptacle is properly grounded and polarized, have it checked by a qualified electrician. It is the responsibility and obligation of the customer to have a properly grounded and correctly polarized 3-prong wall receptacle installed by a qualified electrician. (See Figure 1).

Consult a qualified electrician if the grounding instructions are not completely understood or if doubt exists as to whether the appliance is properly grounded. See Figure 2 for location of electrical outlet inside the opening at the rear.

Locate Outlet In This Area For Oven Connection

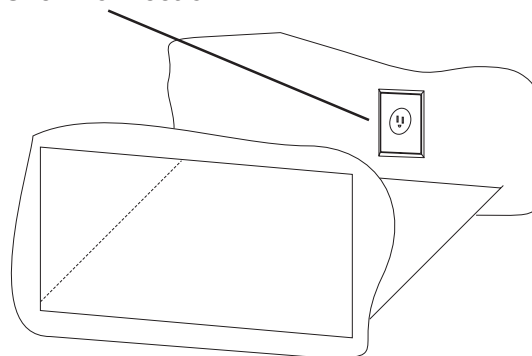


FIG. 2

Installation Procedure


1. Cabinet Opening

The microwave oven opening should be as follows:

For the Model	Opening Size
DMW13W	562mm Wide x 369 mm High
DMW13B	

See Figure 3. All corners should be square. The floor or the microwave opening must be supporting 100 pounds.

	W	H	D
1) Set size	558mm	319mm	426mm
2) Opening Size	562mm	369mm	
3) Cabinet Size	562	369mm	407mm
(Dotted)			

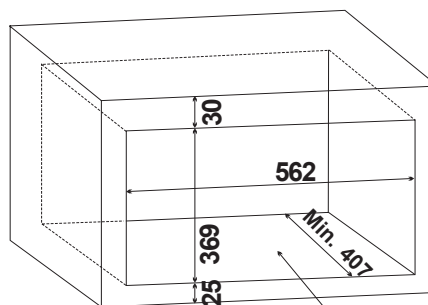

Wood Cabinet

FIG. 3

Should Be Solid Bottom

2. Mount the upper trim on the outer case using three 12mm screws.
And then mount the duct on the outer case using two 12mm screws. See FIG. 4.
3. Mount the lower trim on the base plate using two 12mm screws. See FIG. 4.
4. Put microwave oven into the cabinet.

5. Screw the upper and lower trim onto the cabinet using four 16mm screws. See FIG. 5.

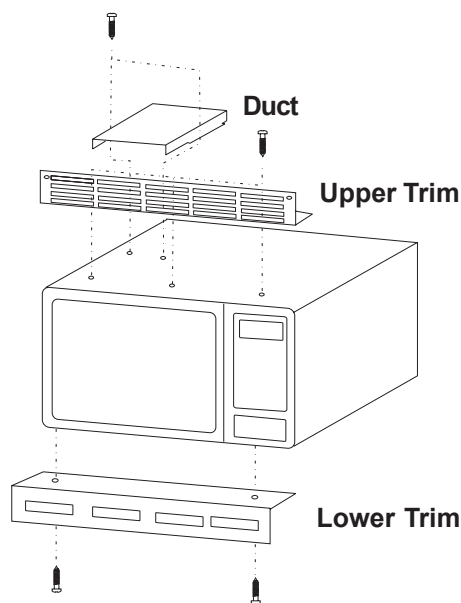


FIG. 4

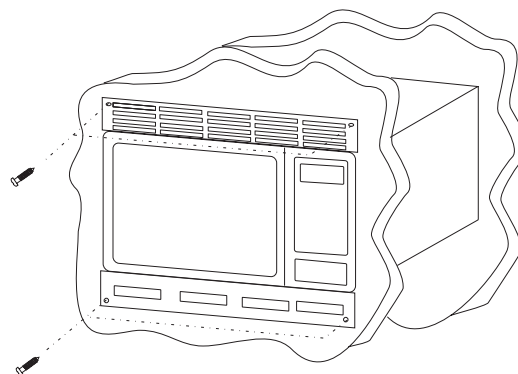


FIG. 5