



USA
SERVICE OFFICE
Dometic, LLC
2320 Industrial Parkway
Elkhart, IN 46516
574-294-2511

CANADA
Dometic, LLC
46 Zatonski, Unit 3
Brantford, ON N3T 5L8
CANADA
519-720-9578

**For Service Center
Assistance Call:**
800-544-4881

SUPPORT LEG KIT 3313887.000

⚠ WARNING

This manual must be read and understood before installation, adjustment, service, or maintenance is performed. This unit must be installed by a qualified service technician. Modification of this product can be extremely hazardous and could result in personal injury or property damage.

⚠ AVERTISSEMENT

Lire et comprendre ce manuel avant de procéder à l'installation, à des réglages, de l'entretien ou des réparations. L'installation de ce produit doit être effectuée par un réparateur qualifié. Toute modification de ce produit peut être extrêmement dangereuse et entraîner des blessures ou dommages matériels.

INSTALLATION & OPERATING INSTRUCTIONS

KIT
3313887.000

3314419.000

Form No. 3314419.000 08/11
(French 3314420.000)
©2011 Dometic, LLC
LaGrange, IN 46761

**Important: These Instructions must
stay with unit. Owner read carefully.**

SAFETY INSTRUCTIONS

This manual has safety information and instructions to help users eliminate or reduce the risk of accidents and injuries.

RECOGNIZE SAFETY INFORMATION



This is the safety alert symbol. It is used to alert you to personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.

UNDERSTAND SIGNAL WORDS

A signal word, when used with the safety alert symbol, will identify a safety hazard and its level of risk for personal injury. A signal word, without the safety alert symbol, will be used for property damage messages only.

⚠ WARNING WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

⚠ CAUTION CAUTION, used with the safety alert symbol, indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.

NOTICE NOTICE is used to address practices not related to personal injury.

⚠ WARNING

Read and follow all safety information and instructions to avoid possible injury or death.

GENERAL INSTRUCTIONS

⚠ WARNING

These instructions must be read and understood before installation of this hardware. This hardware must be installed by a Dometic, LLC Service Center or a qualified service technician. Modification of this product can be extremely hazardous and could result in personal injury or property damage.

Optional accessories:
3313885.000 Kit, Tie Down Strap

Dometic, LLC reserves the right to modify appearances and specifications without notice.

PROCEDURE

A. Install Support Legs

This optional feature may be installed to help support cassette awning when fully extended.

⚠ WARNING


IMPACT OR CRUSH HAZARD. Never leave an open awning unattended. Keep awning stowed (closed) when snow, heavy rain, wind, and severe weather conditions are expected. Failure to obey these warnings could result in death or serious injury.

1. Open awning to its out limit. (See "Open Awning" in Operating Instructions.)
2. Remove power from awning (if applicable).


NOTICE

Make sure power is removed from awning (if applicable) before installing support legs. Otherwise, user may accidentally operate awning while support legs are installed. Failure to obey this notice could result in property damage.

3. Insert support leg assembly's top pivot into lead rail's channel, and slide along lead rail to desired position. See FIG. 1.

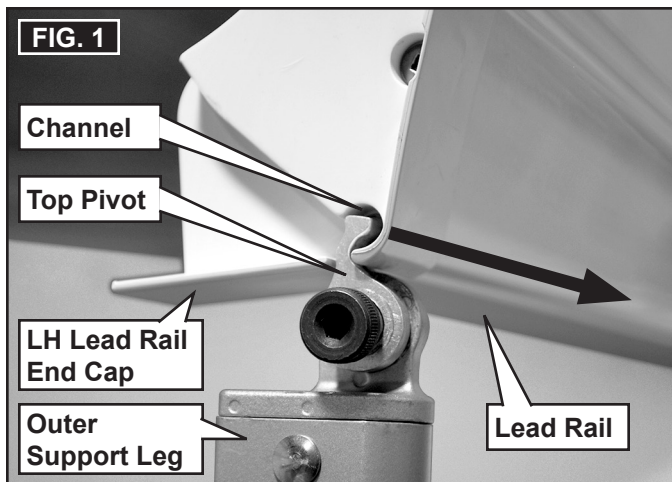

4. Move support leg to vertical position.
5. Grasp outer support leg firmly to prevent unintended movement. Then loosen knob and telescope support leg assembly until lead rail is supported at desired height. Tighten knob to lock in position. See FIG. 2.

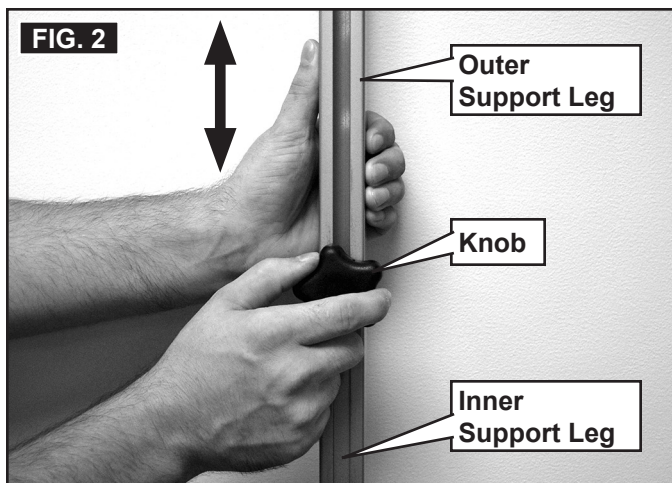

6. Secure patio foot to floor / ground.

Note: For added stability, the ends of the lead rail may be tied with (optional) straps and secured to floor / ground. Order part number 3313885.000 for (1) Tie Down Strap Kit.

B. Prepare Awning To Shed Water

⚠ WARNING

IMPACT OR CRUSH HAZARD. Do not allow water to pool on awning fabric. This will make the awning unstable, and could cause the arm assemblies and lead rail to bend or collapse. Whenever heavy rain is expected, the awning must be placed in the stowed (closed) position.

Support legs will disable the awning's water shed feature. Therefore, one support leg must be placed in water shed position to help prevent water from pooling on awning fabric. Never disengage support leg knob with water pooled on awning fabric. This will cause the awning to collapse.


Failure to obey these warnings could result in death or serious injury.

When support legs are in use during light rain, one support leg must be lowered to create a slope from the other support leg.

Note: It is recommended that the support leg on the end farthest away from entry door is lowered.

1. Loosen knob and telescope support leg down until awning slopes from the other support leg (4" or 100 mm minimum). Then tighten knob to lock in position. See FIG. 2 and 3.

Note: This slope requirement is in addition to the awning's slope from back rail.

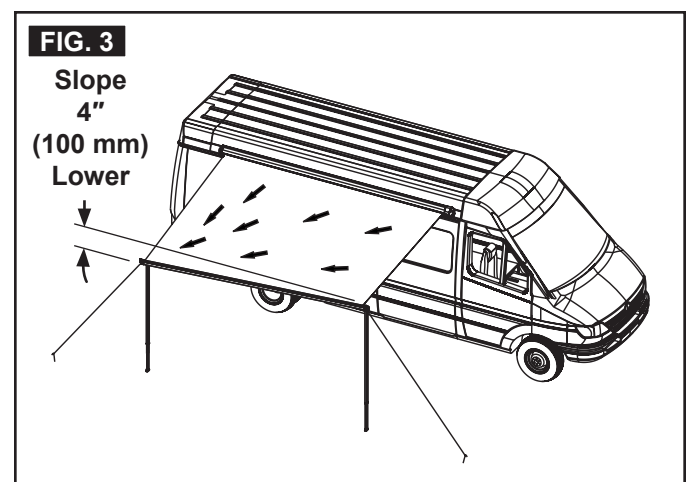

C. Remove Support Legs

Before closing the awning, the support legs must be removed.

1. Unfasten patio foot from floor / ground.
2. Untie straps from lead rail (if secured with optional tie down straps).
3. Loosen knob and telescope support leg to the shortest setting. Then tighten knob to lock in position. See FIG. 2.
4. Slide support leg from lead rail's channel, and stow (put away). See FIG. 1.
5. Return power to awning (if applicable).

D. General Care And Use

WARNING

IMPACT OR CRUSH HAZARD. Never disengage support leg knob with water pooled, snow accumulated, or heavy debris on awning fabric. This will cause the awning to collapse. Failure to obey this warning could result in death or serious injury, and property damage.

NOTICE

Do not use silicone sprays near labels. This could weaken label's adhesive bond to product surfaces.

1. Lubricate lateral arm assemblies with paraffin wax or silicone spray as needed. See FIG. 3.

NOTICE

Remove power from awning (if applicable) before installing support legs. Otherwise, user may accidentally operate awning while support legs are installed. Failure to obey this notice could result in property damage.