




SAFARI CHEF 30 LP / HP

MODEL No: 6545, 6546

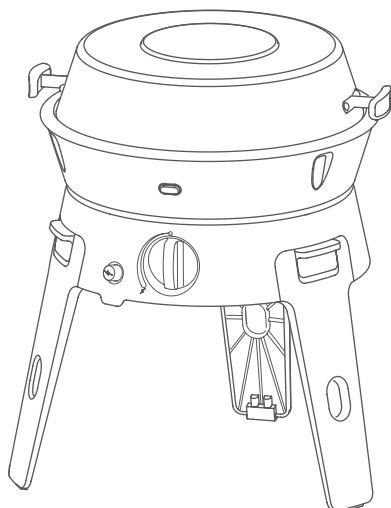


SERVICE GUIDE


Spare Parts

• Always use genuine spares as they have been designed to give optimum performance.

Model no: 6545

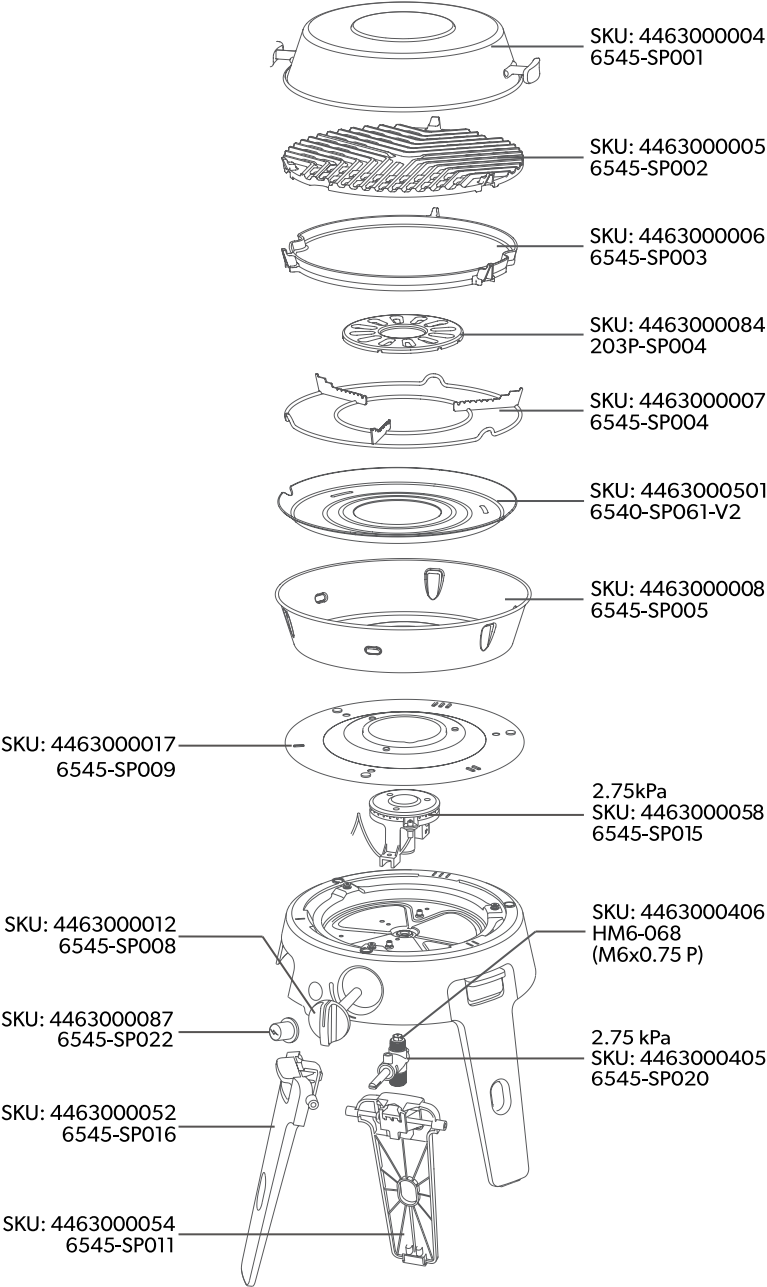

Model no: 6546

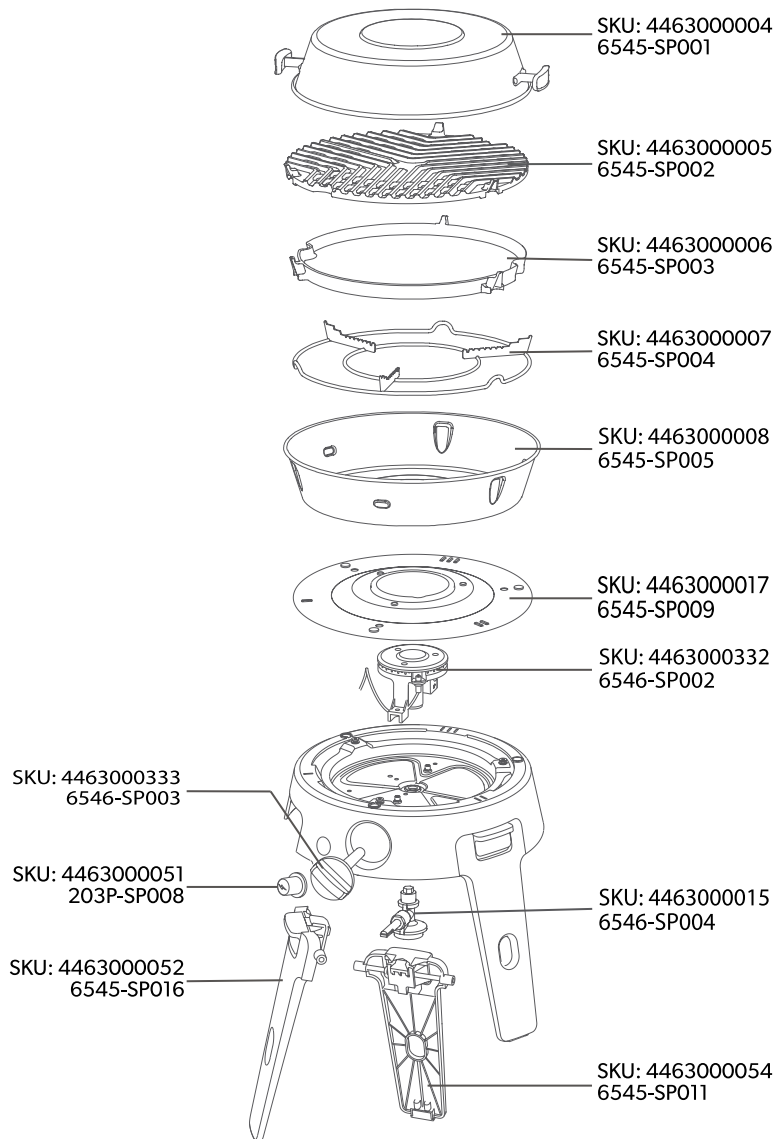


Maintenance

Replacing a blocked jet:

Your appliance is fitted with a specific size injector to regulate the correct amount of gas. If the injector hole is blocked, it may cause a weak flame, or no flame at all. Avoid cleaning the injector with a pin or similar device as it may damage the injector, posing a safety risk to the appliance. To replace the injector, do the following:

1. Remove the fat pan.
2. Remove the three screws on the heat shield plate and remove the heat shield.
3. Remove the two screws on the burner assembly and remove it, taking care to not damage the connected igniter wire.
4. Use a suitable spanner to remove the injector; avoid using pliers as this may damage the injector. Screw the new injector into the valve, being careful not to over-tighten to avoid damage.

Reassemble the appliance by reversing the steps above. Ensure that the igniter cables remain connected during reassembly.

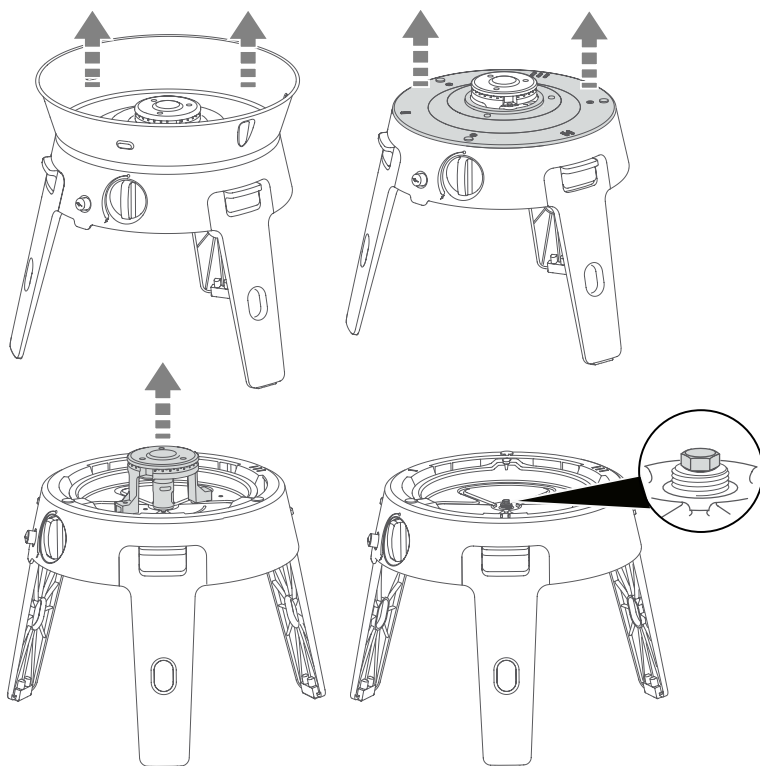

DOMETIC MOBILE COOKING NETHERLANDS B.V.

Ratio 26,
6921 RW Duiven
The Netherlands
Tel: +31 26 319 7740
Email: info@cadaceurope.com

DOMETIC MOBILE COOKING UK LTD.

14 Deanfield Court, Link59 Business Park
Clitheroe, Lancashire, BB7 1QS
United Kingdom
Tel: +44 (0) 333 2000363
Email: info@cadacuk.com

DOMETIC AUSTRALIA PTY. LTD.

7 Nursery Ave, Clayton South,
VIC, 3169, Australia
Tel: 1800 212121 · Fax: +61 7 55076001
sales@dometic.com

DOMETIC NEW ZEALAND LTD.

P O Box 12011
1642 Penrose, Auckland
Te: +64 9 622 1490 · Fax: +64 9 622 1573
Mail: customerservices@dometic.co.nz
