

## **MIDI HEKI**

### **Manual Operation**

MDHDOM13682544 700 x 500 mm / 27.55 x 19.68"  
w/Push Bar – Cream White - roof thickness 1.69-2.05"

MDHDOM13682556 700 x 500 mm / 27.56 x 19.69 x  
w/Push Bar – Cream White – roof thickness 2.09 -2.36"

### **12 Volt operation part number**

MDHDOM13702501E 700 x 500 mm / 27.55" x 19.68"  
Cream White –

### **Mounting Blocks**

roof thickness of 1.0 inches to 1.14 inches - ZUB 1376  
roof thickness of 1.18 inches to 1.34 inches - ZUB 1377  
roof thickness of 1.38 inches to 1.65 inches - ZUB 1378  
roof thickness of 1.69 inches to 2.04 inches - ZUB 1379  
roof thickness of 2.09 inches to 2.36 inches - ZUB 1380

These are all the same color because they are a die cast piece

## **HEKI 2 (manual w/o lights)**

H2DOM11272555 960 x 655mm / 37.80" x 25.78"

## **HEKI 2 DELUXE (manual w/light on each end)**

H2XDOM13352549 960 x 655mm / 37.80" x 25.78"

### **Mounting Blocks**

roof thickness of 1.0 inches to 1.26 inches - ZUB1347 - Color grey  
roof thickness of 1.26 inches to 1.54 inches - ZUB1348 - Color black  
roof thickness of 1.54 inches to 1.81 inches - ZUB1349 - Color yellow  
roof thickness of 1.81 inches to 2.09 inches - ZUB1350 - Color blue  
roof thickness of 2.09 inches to 2.36 inches - ZUB1351 - Color red

*These two models come with the ZUB 1351*

Requires a seal kit so outside air doesn't come inside the RV

ZUB 1086

\$15.95

For Australia – the seal kit is not required

### **HEKI 3 Plus (manual crank up w/o lights)**

H2DOM133625S      960 x 655mm / 37.80" x 25.78"  
Cream White w/Duette honeycomb blind system

### **HEKI 4 DELUXE (manual crank up w/o lights)**

H4DOM13422550      960 x 655mm / 37.80" x 25.78"

Mounting Blocks

roof thickness of 1.0 inches to 1.26 inches - ZUB1347 - Color grey  
roof thickness of 1.26 inches to 1.54 inches - ZUB1348 - Color black  
roof thickness of 1.54 inches to 1.81 inches - ZUB1349 - Color yellow  
roof thickness of 1.81 inches to 2.09 inches - ZUB1350 - Color blue  
roof thickness of 2.09 inches to 2.36 inches - ZUB1351 - Color red

### **MINI HEKI PLUS**

ZUB13522502      15.75 X 15.75    roof thickness 1.69 – 2.36"  
No Vent

**All of these models must be installed on flat surface**

## Midi Heki – for motorhomes and travel trailers

The large roof cut-out [27 35/64" x 19 43/64"] makes for optimal ventilation and incidence of light. Easy operation with manual lever or crank operation or electric control.

- Interior frame with blind and fly screen [seamlessly adjustable independently]
- Available with or without fixed ventilation
- Maximum opening angle: 45° [lever version]; 60° [crank and electric versions]
- Three opening positions [lever version]; stepless [crank and electric versions]
- Double-glazed acrylic dome
- For roof thickness from 31/32" to 2 23/64"

## Mini Hekiplus – for motorhomes and travel trailers

This small rooflight is a perfect fit for standard 15 47/64" x 15 47/64" roof cut-outs. It gives a maximum incidence of light.

- Interior frame with blind and fly screen [seamlessly adjustable independently]
- Convenient positioning of the glass dome with practical lever system
- Available with or without fixed ventilation
- Maximum opening angle: approx. 50°
- Three opening positions: completely open, half open, bad weather position
- Double-glazed acrylic dome
- For roof thickness from 31/32" to 2 23/64"

## Mini Heki S – for travel trailers

Small rooflight, great effect: Mini Heki S was designed for standard-size roof cut-outs [15 47/64" x 15 47/64"].

- Interior frame with blind and fly screen [seamlessly adjustable independently]
- Easy handle operation
- Fixed ventilation
- Maximum opening height: approx. 3 9/64"
- Five opening positions
- Single-glazed acrylic dome
- For roof thickness from 57/64" to 2 23/64"

## SEITZ Midi Heki / Mini Hekiplus / Mini Heki S

Lift/tilt rooflights for motorhomes and/or travel trailers

Model	Midi Heki	Mini Hekiplus	Mini Heki S
Motorhome	■	■	-
Travel trailer	■	■	■
Operation	Lever/crank/electric	Lever	Handles
Glazing Dome PMMA	Double-glazed	Double-glazed	Single-glazed
Opening positions	Lever: 3/crank: stepless/electric: stepless	3	5
Max. opening angle	Lever: 45°/crank: 60°/electric: 60°	50°	-
Weight [lb]	Lever: 17.64/crank: 18.74/electric: 19.84	7.28	6.39
Blind	Single-pleated	Single-pleated	Single-pleated
Fly screen	Single-pleated	Single-pleated	Single-pleated
Fixed ventilation	Possible	Possible	■
Roof thickness	31/32" – 2 23/64"	31/32" – 2 23/64"	57/64" – 2 23/64"
Frame material	ASA	ASA	ASA
Frame color	RAL 9001	RAL 9001	RAL 9001
External space requirement	34 41/64" x 25 37/64"	21 41/64" x 20 5/64"	19 43/64" x 19 43/64"
Cut-out size	27 35/64" x 19 43/64"	15 47/64" x 15 47/64"	15 47/64" x 15 47/64"

## Heki 2 de Luxe – exclusive rooflight for travel trailers

- Interior frame with blind and fly screen [seamlessly adjustable together]
- Integrated lighting
- High thermal insulation with double-pleated Duette honeycomb blind
- Fixed ventilation
- Maximum opening angle: 55°
- Pneumatic springs for convenient rooflight positioning
- Double-glazed acrylic dome
- For roof thickness from 31/32" to 2 23/64"

## Heki 2 – for travel trailers

- Interior frame with blind and fly screen [seamlessly adjustable together]
- Fixed ventilation
- Maximum opening angle: 55°
- Pneumatic springs for convenient rooflight positioning
- Double-glazed acrylic dome
- For roof thickness from 31/32" to 2 23/64"

## Heki 1 – for motorhomes

- Interior frame with blind and fly screen [seamlessly adjustable together]
- Robust locking system
- Maximum opening angle: 70°
- Five opening positions for optimum ventilation
- Polyurethane frame with high insulating quality
- Double-glazed acrylic dome
- For roof thickness from 1 1/16" to 2 23/64"

## SEITZ Heki 1 / Heki 2 / Heki 2 de Luxe / Heki 3plus / Heki 4plus

Lift/tilt rooflights for motorhomes and/or travel trailers

Model	Heki 1	Heki 2	Heki 2 de Luxe	Heki 3plus	Heki 4plus
Motorhome	■	–	–	■	■
Travel trailer	■	■	■	■	■
Operation	Crank / Handles	Lever	Lever	Crank	Remote control
Glazing Dome PMMA	Double-glazed	Double-glazed	Double-glazed	Double-glazed	Double-glazed
Opening positions	Crank: variable/ Handles: 5	3	3	variable	variable
Max. opening angle	70°	55°	55°	70°	70°
12 V lights	–	–	4 x 5 watts	2 x 8 watts	2 x 8 watts
Weight [lb]	48.5	24.25	24.25	33.07	34.17
Rain sensor	–	–	–	–	■
Blind	Roller blind system	Roller blind system	Duette	Duette	Duette
Fly screen	Roller blind system	Roller blind system	Roller blind system	Single-pleated	Single-pleated
Fixed ventilation	–	■	■	–	–
Roof thickness	27 – 2 23/64"	31/32" – 2 23/64"	31/32" – 2 23/64"	31/32" – 2 23/64"	31/32" – 2 23/64"
Frame material	Polyurethane foam	ASA	ASA	ASA	ASA
Frame color	RAL 9001	RAL 9001	RAL 9001	RAL 9001	RAL 9001
External space requirement	43 19/64" x 32 9/32"	42 33/64" x 31 3/32"	42 33/64" x 31 3/32"	42 33/64" x 31 3/32"	42 33/64" x 31 3/32"
Cut-out size	37 25/32" x 25 25/32"	37 25/32" x 25 25/32"	37 25/32" x 25 25/32"	37 25/32" x 25 25/32"	37 25/32" x 25 25/32"



## THE HEKI LINE-UP FROM DOMETIC

### Midi Heki – Simply Great

- Great for creating natural light to those confined areas in a number of floorplans.
- Excellent vehicle to create great ventilation through your RV.
- Cut out size = 27-1/2" x 19-5/8"
- Work on roof structures from 1" to 2-3/8"
- Blind and screen system are guided on each side for perfect control.
- Seamless and independent positioning of blind and screen systems.
- You can open the dome up to 45° with bar operation.
- You can open the dome up to 60° with the electric and crank models.
- Double-glazed acrylic dome

### Heki 2 / Heki 2 Deluxe

- Great for creating natural light to those confined areas in a number of floorplans.
- Excellent vehicle to create great ventilation through your RV.
- Cut out size = 37-3/4" x 25-3/4"
- Work on roof structures from 1-1/4" to 2-3/8"
- Blind and screen can be operated together.
- Pneumatic struts for three opening positions
- You can open the dome up to 55° with bar operation.
- Double-glazed acrylic dome
- Deluxe model has integrated 12-volt lights on each end for subtle illumination.



## THE HEKI LINE-UP FROM DOMETIC

### Heki 3 Plus

- Great for creating natural light to those confined areas in a number of floorplans.
- Excellent vehicle to create great ventilation through your RV.
- Cut out size = 37-3/4" x 25-3/4"
- Work on roof structures from 1-1/4" to 2-3/8"
- Duette honeycomb blind and screen system are guided on each side for perfect control.
- Seamless and independent positioning of blind and screen systems.
- Integrated 12-volt lights on each end for subtle illumination.
- Open and close the dome from a crank handle.
- Dome opens to 70°.
- Double-glazed acrylic dome

### Heki 4 Plus

- Same comfort features as Heki 3 Plus with the following additions:
- Remote electric operation
- Rain sensor to close the dome automatically
- Robust locking system with an LED to indicate correct locking



# ■ Highest handling comfort with bar, crank or electronic control

**NEW**


► SEITZ MIDI HEKI

The Midi Heki not only offers perfect incidence of light, but also very easy handling and highest comfort for perfect ventilation – thanks to the new crank and electronic versions. Like the Midi Heki with operating bar blind and fly net are guided sideways to allow perfect control. All blind systems are seamlessly adjustable and can be operated independently of each other. The cut-out dimensions are 700 x 500 mm.


- Double-glazed, aerodynamically shaped glass dome made of acrylic glass and tinted light grey
- Maximum opening position: normal version 45° in 3 opening positions, crank and electronic models 60° seamlessly adjustable
- With the glass overlapping the sides, and the outer frame stands up, so no water can splash inside when the glass dome is in bad weather position
- Easiest possible adjustment of the glass dome by means of a handy operating lever; the dome is automatically locked when closed
- Frame colour: RAL 9001
- Frame made of durable, weatherproof ASA
- Crank and electronic model can be upgraded with additional fly net frame
- Cut-out dimensions: 700 x 500 mm
- Radius in corners 4 x 12 mm
- Clearance: 585 x 404 mm for maximum incidence of light
- Easy installation in roofs with a thickness of 25 to 60 mm
- Weight: 8.0 kg with bar, 8.5 kg with crank, 9 kg with electronic control
- Blind and fly net are guided sideways and can be adjusted seamlessly, independent of each other
- Easy adjustment of the glass dome via operating bar, crank or electronic control, safety lock in closed position
- Glass dome opens seamlessly (up to approx. 60°)

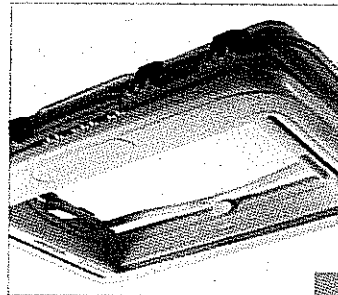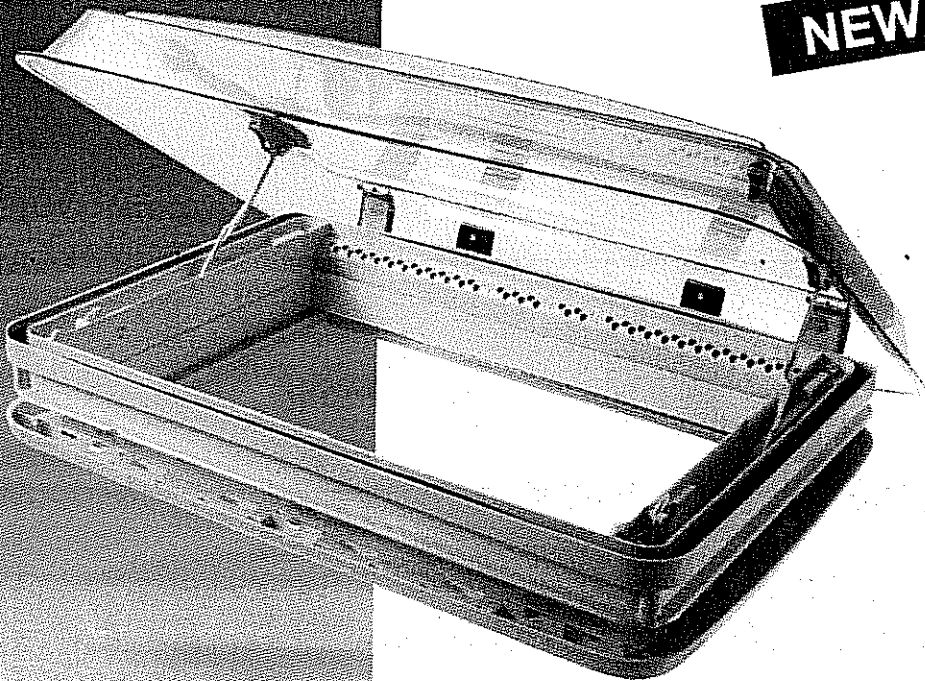


with bar

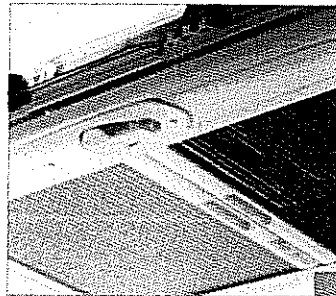

with crank

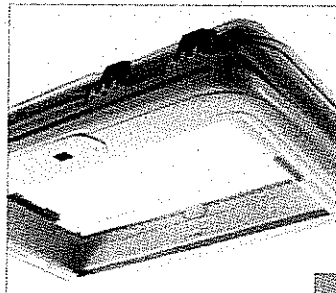


with electronic drive

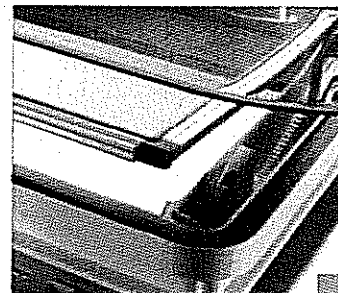


Fly net frame (optional accessory)

# HEKI 2 DELUXE

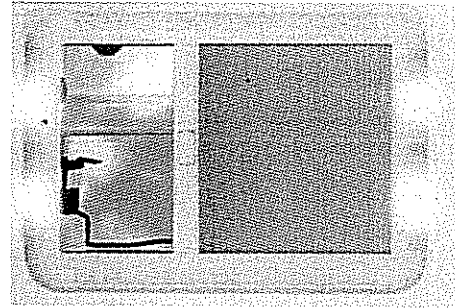

*Subdued Lighting and optimal thermal insulation provide comfortable coziness.*

- Integrated 4 X 5 Watt bulbs for soft and subdued lighting
- Innovative Duette honeycomb material for greatest possible thermal insulation
- Blind and screen mounted to the inner frame, can be operated together seamlessly, by means of 2 fixing bars.
- New fixing bars specially developed to match the colors of the inner frame
- Inner frame available separately for upgrading the proven Heki 2

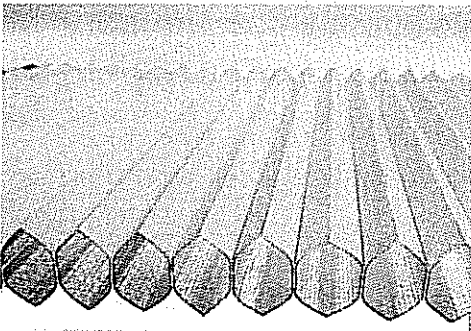

Honeycomb material

- ✓ Offers a high degree of thermal insulation by hollow chamber construction
- ✓ Absorbs up to 99% of harmful UV rays through the inner aluminum lining of the honeycomb material
- ✓ Promotes the feeling of warmth and coziness





RECORD THIS UNIT INFORMATION FOR  
FUTURE REFERENCE:  
Model Number \_\_\_\_\_  
Date Purchased \_\_\_\_\_

## MIDI HEKI SKYLIGHTS

MDHDOM1368XXXX (WITH OPERATING BAR)  
MDHDOM1369XXXX (WITH CRANK)  
MDHDOM1370XXXX (ELECTRIC)

### SERVICE OFFICE:

USA  
Dometic, LLC  
2320 Industrial Pkwy  
Elkhart, IN 46516  
574-294-2511

CANADA  
Dometic, LLC  
46 Zatonski, Unit 3  
Brantford, ON N3T 5L8  
CANADA  
519-720-9578

For Service Center  
Assistance Call:  
800-544-4881

### ⚠ WARNING

This manual must be read and understood before installation, adjustment, service, or maintenance is performed. This unit must be installed by a qualified service technician. Modification of this product can be extremely hazardous and could result in personal injury or property damage.

### ⚠ AVERTISSEMENT

Lire et comprendre ce manuel avant de procéder à l'installation, à des réglages, de l'entretien ou des réparations. L'installation de cet appareil doit être effectuée par un réparateur qualifié. Toute modification de cet appareil peut être extrêmement dangereuse et entraîner des blessures ou dommages matériels.

## INSTALLATION INSTRUCTIONS

MDHDOM1368XXXX  
MDHDOM1369XXXX  
MDHDOM1370XXXX



RECORD THIS UNIT INFORMATION FOR

FUTURE REFERENCE:

Model Number \_\_\_\_\_

Date Purchased \_\_\_\_\_

# HEKI 2 SKYLIGHTS HEKI 2 DELUXE SKYLIGHTS

H2DOM1127XXXX (HEKI 2)  
H2XDOM1335XXXX (HEKI 2 DELUXE)

## SERVICE OFFICE:

USA  
Dometic, LLC  
2320 Industrial Pkwy  
Elkhart, IN 46516  
574-294-2511

CANADA  
Dometic, LLC  
46 Zatonski, Unit 3  
Brantford, ON N3T 5L8  
CANADA  
519-720-9578

For Service Center  
Assistance Call:  
800-544-4881

### WARNING

This manual must be read and understood before installation, adjustment, service, or maintenance is performed. This unit must be installed by a qualified service technician. Modification of this product can be extremely hazardous and could result in personal injury or property damage.

### AVERTISSEMENT

Lire et comprendre ce manuel avant de procéder à l'installation, à des réglages, de l'entretien ou des réparations. L'installation de cet appareil doit être effectuée par un réparateur qualifié. Toute modification de cet appareil peut être extrêmement dangereuse et entraîner des blessures ou dommages matériels.

## OPERATING INSTRUCTIONS

H2DOM1127XXXX  
H2XDOM1335XXXX



RECORD THIS UNIT INFORMATION FOR  
FUTURE REFERENCE:  
Model Number \_\_\_\_\_  
Date Purchased \_\_\_\_\_

# HEKI 3plus SKYLIGHTS

H3DOM1336XXXX (HEKI 3plus)

## SERVICE OFFICE:

### USA

Dometic, LLC  
2320 Industrial Pkwy  
Elkhart, IN 46516  
574-294-2511

### CANADA

Dometic, LLC  
46 Zatonski, Unit 3  
Brantford, ON N3T 5L8  
CANADA  
519-720-9578

For Service Center  
Assistance Call:  
800-544-4881

## WARNING

This manual must be read and understood before installation, adjustment, service, or maintenance is performed. This unit must be installed by a qualified service technician. Modification of this product can be extremely hazardous and could result in personal injury or property damage.

## AVERTISSEMENT

Lire et comprendre ce manuel avant de procéder à l'installation, à des réglages, de l'entretien ou des réparations. L'installation de cet appareil doit être effectuée par un réparateur qualifié. Toute modification de cet appareil peut être extrêmement dangereuse et entraîner des blessures ou dommages matériels.

# OPERATING INSTRUCTIONS

H3DOM1336XXXX



RECORD THIS UNIT INFORMATION FOR  
FUTURE REFERENCE:  
Model Number \_\_\_\_\_  
Date Purchased \_\_\_\_\_

## HEKI 4 SKYLIGHTS

H4DOM1342XXXX (HEKI 4)

### SERVICE OFFICE:

#### USA

Dometic, LLC  
2320 Industrial Pkwy  
Elkhart, IN 46516  
574-294-2511

#### CANADA

Dometic, LLC  
46 Zatonski, Unit 3  
Brantford, ON N3T 5L8  
CANADA  
519-720-9578

For Service Center  
Assistance Call:  
800-544-4881

### WARNING

This manual must be read and understood before installation, adjustment, service, or maintenance is performed. This unit must be installed by a qualified service technician. Modification of this product can be extremely hazardous and could result in personal injury or property damage.

### AVERTISSEMENT

Lire et comprendre ce manuel avant de procéder à l'installation, à des réglages, de l'entretien ou des réparations. L'installation de cet appareil doit être effectuée par un réparateur qualifié. Toute modification de cet appareil peut être extrêmement dangereuse et entraîner des blessures ou dommages matériels.

## INSTALLATION INSTRUCTIONS

H4DOM1342XXXX